


TEE-PANEL INSTALLATION DETAILS

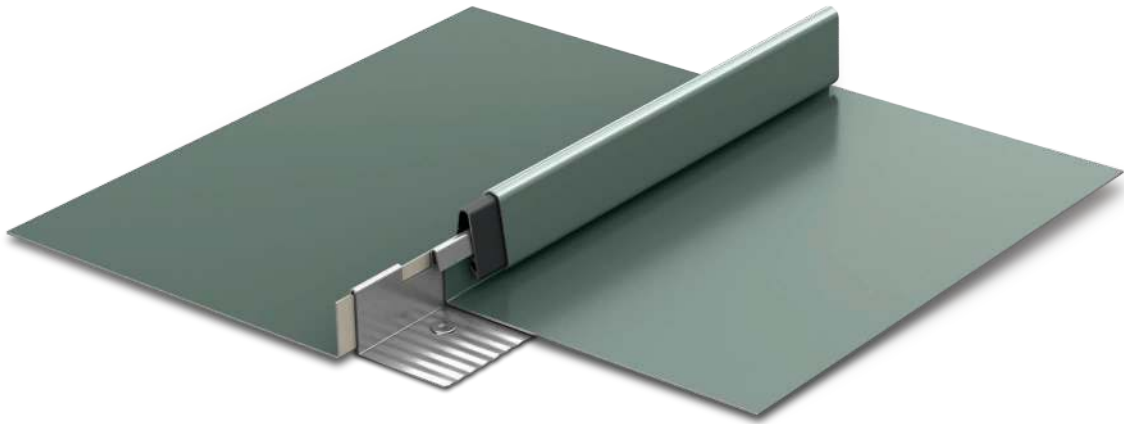

**BERRIDGE
MANUFACTURING
COMPANY**

800-669-0009 • www.Berridge.com

INDEX	T-0
INDEX	T-1
INSTALLATION INSTRUCTIONS	TI-1
INSTALLATION INSTRUCTIONS	TI-2
INSTALLATION INSTRUCTIONS	TI-3
INSTALLATION INSTRUCTIONS	TI-4
INSTALLATION INSTRUCTIONS	TI-5
INSTALLATION INSTRUCTIONS	TI-6
INTRODUCTION TO TYPICAL DETAILS	T-2
OVERVIEW - TEE-PANEL STANDING SEAM SYSTEM	T-3
TEE-PANEL SPLICE DETAIL	T-4
SEAM SPLICE DETAIL	T-5
ALTERNATE SEAM SPLICE DETAIL	T-6
INSULATED DECK DETAIL	T-7
EAVE DETAIL	T-10
EAVE DETAIL	T-11
EAVE DETAIL	T-12
RIDGE/HIP DETAIL	T-20
RIDGE/HIP DETAIL OVER OPEN FRAMING	T-21
GABLE AT RIDGE DETAIL	T-22
GABLE DETAIL	T-30
GABLE DETAIL	T-31
GABLE DETAIL	T-32
GABLE DETAIL	T-32
PARAPET DETAIL	T-40
HEAD WALL DETAIL	T-50
RAKE WALL DETAIL	T-51
HEAD WALL DETAIL	T-52
RAKE WALL DETAIL	T-53
RAKE AT EAVE	T-54
SLOPE TRANSITION DETAIL	T-60
SLOPE TRANSITION DETAIL ROOF TO FASCIA - A	T-61
SLOPE TRANSITION DETAIL ROOF TO FASCIA - B	T-62
FOLDING TEE-CLIP INSTALLATION	T-63
VALLEY FLASHING DETAIL	ST-70
VALLEY ISOMETRIC DETAIL	ST-71
ROOF PENETRATION (PREFERRED METHOD) IN PAN OF PANEL ONLY 4" DIA. OR LESS	T-80
ROOF PENETRATION OF PANEL SEAM ISOMETRIC AND PLAN VIEW	T-81
ROOF PENETRATION OF PANEL SEAM SECTIONS	T-82
ROOF PENETRATION RECTANGULAR/SQUARE	T-83
ROOF PENETRATION SECTION A	T-84



**BERRIDGE
MANUFACTURING
COMPANY**

INDEX

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-0

ROOF PENETRATION SECTION B
ROOF PENETRATION ISOMETRIC

T-85
T-86

UL 90 APPROVED TEE-PANEL ASSEMBLY CONSTRUCTION NO. 296
UL FIRE RESISTANCE ROOF ASSEMBLY
UL FIRE RESISTANCE ROOF ASSEMBLY
UL FIRE RESISTANCE ROOF ASSEMBLY

T-90
T-91
T-92
T-93



**BERRIDGE
MANUFACTURING
COMPANY**

INDEX

DATE: 06-01-97

Tee-Panel System

PAGE/FILE
T-1

- A. BERRIDGE TEE PANEL: AVAILABLE WITH A PAN WIDTH OF 12-3/4" OR 19-3/4" AND USED WITH THE BERRIDGE PATENTED SNAP-ON SEAM (US PATENT NO. 4,641,475) TO PROVIDE A CONSTANT SEAM HEIGHT OF 1".

THE 12-3/4" PAN WIDTH CAN EITHER BE FACTORY FABRICATED OR FIELD FABRICATED USING THE BERRIDGE MODEL SS-14 PORTABLE ROLL FORMER. THE 19-3/4" PAN WIDTH IS FACTORY FABRICATED ONLY.

PLEASE CONTACT BERRIDGE MANUFACTURING COMPANY FOR FURTHER INFORMATION REGARDING THE BERRIDGE SS-14 PORTABLE ROLL FORMER.

- B. MINIMUM SLOPE: THE TEE-PANEL IS RECOMMENDED FOR SLOPES OF 1:12 AND GREATER IN MOST AREAS OF THE COUNTRY. IN HEAVY SNOW AREAS OR AREAS WHERE FREEZE-THAW CYCLES ARE PREVALENT, A MINIMUM ROOF SLOPE OF 3:12 IS RECOMMENDED.

A DOUBLE LAYER OF NUMBER THIRTY FELT UNDERLAYMENT OR EQUAL COVERING THE ENTIRE SUBSTRATE IS RECOMMENDED FOR ALL APPLICATIONS WHERE THE ROOF SLOPE IS 3:12 OR LESS.

- C. MATERIAL STORAGE: CAUTION MUST BE EXERCISED IN STORAGE OF MATERIALS PRIOR TO INSTALLATION. KEEP ALL BERRIDGE PREFINISHED MATERIAL IN A DRY LOCATION WITH ADEQUATE VENTILATION AND OUT OF DIRECT SUNLIGHT.

EXPOSURE TO DIRECT SUNLIGHT AND/OR MOISTURE MAY CAUSE THE FACTORY APPLIED STRIPPABLE PLASTIC FILM TO ADHERE TO THE METAL PERMANENTLY AND DISCOLOR THE FINISH.

- D. STRIPPABLE FILM: THE STRIPPABLE PLASTIC FILM WHICH IS APPLIED OVER MOST BERRIDGE PREFINISHED PRODUCTS, PANELS, FLASHINGS, COILS AND FLAT SHEETS PROTECTS THE FINISH DURING FABRICATION AND TRANSIT. THIS FILM MUST BE REMOVED PRIOR TO INSTALLATION.

- E. SOLID SHEATHING REQUIREMENTS: BERRIDGE MANUFACTURING COMPANY RECOMMENDS THE USES OF EITHER BERRIDGE 24 GA. CORRUGATED METAL (NOMINAL 2-1/2" PITCH x 11/16" DEPTH) OR A MINIMUM OF 1/2" SOLID WOOD SHEATHING TO PROVIDE SUFFICIENT HOLDING POWER FOR FASTENERS. CONTACT BERRIDGE MANUFACTURING'S ENGINEERING DEPARTMENT FOR USE OF ANY OTHER TYPE OF SOLID SHEATHING.

DUE TO # 30 FELTS TENDENCY TO TEAR WHEN USED OVER CORRUGATED DECKING, BERRIDGE MANUFACTURING RECOMMENDS GRACE ICE AND WATERSHIELD OR EQUAL TO BE USED AS AN UNDERLAYMENT FOR ALL CORRUGATED DECKS.

NOTE: FOR PROJECTS REQUIRING UL 90 ASSEMBLY, REFER TO UL 90 DETAILS.

F. SHEATHING INSPECTION:

1. SHEATHING END JOINTS SHOULD BE STAGGERED.
2. ALL END JOINTS SHOULD MEET AT EITHER A JOIST OR RAFTER.
3. BLOCKING OR "H" CLIPS SHOULD BE USED ON PLYWOOD IF JOINTS DO NOT REMAIN FLAT UNDER THE WEIGHT OF WORKMEN.
4. USE SHIMS TO KEEP ENTIRE SUBSTRATE EVEN. UNEVEN SUBSTRATE WILL RESULT IN "OIL-CANNING" IN PANELS. SUBSTRATE SHOULD BE LEVEL TO 1/4" IN 20'-0".



**BERRIDGE
MANUFACTURING
COMPANY**

INSTALLATION INSTRUCTIONS

Tee-Panel System

DATE: 04-06-07

PAGE/FILE
TI-1

5. ALL CUTS AT PENETRATIONS SHOULD BE TIGHT, WITHOUT GAPS.
6. USE WOOD FRAMED CRICKETS AT LARGE PENETRATIONS.
7. MAKE SURE SUBSTRATE JOINTS ARE TIGHT AT ALL HIPS, VALLEYS AND RIDGES.

G. FASCIA/RAKE INSPECTION:

1. STRIKE A LINE THE FULL LENGTH OF THE FASCIA OR RAKE. IF NOT STRAIGHT, CORRECT WITH SHIMS.
2. MAKE SURE FASCIA/RAKE IS FLUSH WITH ROOF SUBSTRATE SHEATHING.

H. FELT UNDERLAYMENT: A SINGLE LAYER OF NUMBER THIRTY FELT UNDERLAYMENT (OR EQUAL) MUST BE APPLIED OVER SOLID SHEATHING AS SHOWN IN THE BERRIDGE MANUFACTURING COMPANY TYPICAL FELTING DETAILS. THE USE OF ADDITIONAL LAYERS OF NUMBER THIRTY FELT IS RECOMMENDED ON LOW-SLOPED ROOFS, AT ALL VALLEY CONDITIONS, AT ROOF PENETRATIONS, AND CERTAIN OTHER FLASHING CONDITIONS AS DEPICTED IN THE TEE-PANEL TYPICAL DETAILS. GRACE ICE AND WATER SHIELD MAYBE REQUIRED ON LOW SLOPED ROOFS OR AT CERTAIN FLASHING CONDITIONS.

I. FELTING INSTALLATION:

1. DO NOT USE RED ROSIN PAPER UNDER METAL ROOFING PANELS.
2. SWEEP ROOF AREA CLEAN.
3. USE FLAT HEAD GALVANIZED ROOFING NAILS x 1-1/4" LONG WITH BERRIDGE GALVANIZED FELT CAPS.
4. INSTALL VALLEY FELT FIRST.
5. INSTALL FELT PARALLEL TO EAVE (2 LAYERS REQUIRED AT EAVE), STARTING AT EAVE AND USING MINIMUM 6" LAPS. USE TWO LAYERS OF FELT ON ENTIRE ROOF DECK IF ROOF SLOPE IS 3:12 OR LESS. 2 LAYERS REQUIRED AT EAVE REGARDLESS OF SLOPE.
6. INSULATE BETWEEN WOOD BLOCKING AND METAL WITH FELT OR ICE AND WATER SHIELD.

J. THERMAL MOVEMENT: EXPANSION AND CONTRACTION OF PANELS WHICH EXCEED THIRTY FEET IN LENGTH CAN BE A FACTOR IN THE DESIGN AND INSTALLATION OF FLASHING AND PANELS. PLEASE REFER TO THE CHART ON PAGE TI-6 TO DETERMINE ANTICIPATED THERMAL MOVEMENT OF THE PANELS. IMPROPERLY DESIGNED FLASHING CAN ALLOW PANELS TO DISENGAGE FROM THE FLASHING, ALLOW OIL-CANNING IN PANEL AND/OR CAUSE FLASHING TO WORK LOOSE FROM ITS ANCHORAGE.

K. ELECTROLYSIS: AVOID ALLOWING FLASHING AND PANELS TO COME INTO CONTACT WITH EITHER LEAD OR COPPER, AND PREVENT EXPOSURE TO WATER RUNDOWN FROM COPPER AND/OR LEAD.

L. FLASHING: IF BERRIDGE MANUFACTURING COMPANY IS TO SUPPLY FLASHING, ALL FLASHINGS WILL BE FABRICATED IN 10'-0" LENGTHS WITH SQUARE END CUTS ONLY. THE PURCHASER MUST PROVIDE ALL DIMENSIONS AND DEGREE OF ANGLES.



**BERRIDGE
MANUFACTURING
COMPANY**

INSTALLATION INSTRUCTIONS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
TI-2

M. FLASHING INSTALLATION:

1. REMOVE STRIPPABLE PLASTIC FILM FROM ALL FLASHINGS PRIOR TO INSTALLATION.
2. ALWAYS STAGGER JOINTS WHEN ONE FLASHING IS INSTALLED OVER OTHER FLASHINGS.
3. INSTALL ALL FLASHINGS AS PER BERRIDGE TYPICAL DETAILS.
4. ALL FLASHINGS ARE TO BE DESIGNED AND INSTALLED TO NOT TRAP WATER.

N. PANELS: BERRIDGE MANUFACTURING COMPANY WILL PROVIDE SQUARE END CUTS ONLY ON ALL TEE-PANELS. COMPUTATION OF ALL QUANTITIES AND DIMENSIONS ARE THE RESPONSIBILITY OF THE PURCHASER.

O. PANEL INSTALLATION:

1. REMOVE STRIPPABLE PLASTIC FILM FROM EACH PANEL PRIOR TO INSTALLATION.
2. DETERMINE CENTER LINE OF ROOF AREA AND START PANEL INSTALLATION AT THE CENTER OF THE ROOF, WORKING TOWARD THE GABLE ENDS. MAKE SURE PANELS ARE PERPENDICULAR TO THE EAVE. AT VALLEY AREAS, MAKE SURE PANELS ARE INSTALLED SO THAT DRAINAGE HAS FREE FLOW AND IS NOT OBSTRUCTED BY PANEL SEAMS.
3. INSTALL TEE-PANEL CLIPS AS PER BERRIDGE TYPICAL DETAILS AND TEE-CLIP INSTALLATION NOTES.
4. EACH PANEL IS TO BE KEPT TIGHT AGAINST THE LEG OF THE ADJOINING PANEL. NEVER PERMIT A GAP BETWEEN VERTICAL LEGS. ANY CRIMPS IN VERTICAL LEGS MUST BE STRAIGHTENED (TOTALLY STRAIGHT WITHOUT ANY BENDS, CRIMPS, CREASES, ETC.) PRIOR TO SEAM INSTALLATION.
5. ALWAYS INSTALL SEAM AS YOU INSTALL EACH PANEL. DO NOT INSTALL PANELS FIRST AND THEN FOLLOW LATER WITH SEAM INSTALLATION.
6. KEEP PANELS ALIGNED SO THAT SEAMS MATCH AT HIPS. VALLEYS AND WHERE VERTICAL PANELS ADJOIN ROOF PANELS. DO NOT INSTALL LONG CONTINUOUS RUNS OF PANELS ALL AT ONE TIME WHERE SEAM LINES MUST MATCH. INSTALL 10 OR 12 PANELS IN ONE ELEVATION AND THEN FOLLOW WITH A LIKE NUMBER OF PANELS ON THE OTHER ELEVATION. WHEN YOU INSTALL PANELS IN THIS MANNER, YOU WILL BE ABLE TO MAKE ANY ADJUSTMENTS REQUIRED TO INSURE SEAM MATCHING.
7. COPPER-COTE™, CHAMPAGNE, LEAD-COTE™, AND PREWEATHERED GALVALUME® PANEL INSTALLATION: NOTE THE SERIES OF ARROWS PAINTED ON THE UNDERSIDE OF THE PANEL. ALL PANELS MUST BE INSTALLED IN A CONSISTENT MANNER, MEANING THAT THE ARROWS ON EVERY PANEL ARE ALL POINTING IN THE SAME DIRECTION. IF A PANEL IS REVERSED (ARROWS POINTING OPPOSITE OF THOSE ON OTHER PANELS) IT WILL APPEAR, FROM A DISTANCE, A DIFFERENT SHADE DUE TO THE GRANULAR EFFECT OF THE PIGMENTS IN THE FINISH. METALLIC FINISHES ARE MATCH - LOT FINISHES. DO NOT MIX LOTS.

P. SNAP-ON SEAM: BERRIDGE PATENTED SNAP-ON SEAMS HAVE BEEN LABORATORY TESTED ON BOTH SOLID WOOD SUBSTRATE AND METAL FRAMING, BOTH ASSEMBLIES SHOWED NO



**BERRIDGE
MANUFACTURING
COMPANY**

INSTALLATION INSTRUCTIONS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
TI-3

SIGNIFICANT LEAKAGE IN ACCORDANCE WITH THE ASTM E 283-84 AND ASTM E 331-86 AIR AND WATER INFILTRATION TESTS. TEST REPORTS ARE AVAILABLE UPON REQUEST.

Q. SNAP-ON SEAM INSTALLATION:

1. INSTALL SEAMS WITH HAND PRESSURE ONLY. DO NOT POUND OR HAMMER SEAMS INTO PLACE; THIS WILL DAMAGE THE SEAM AND VINYL, PERMITTING WATER INFILTRATION.
2. INSPECT EACH SEAM AS YOU INSTALL IT TO MAKE SURE THE VINYL IS PROPERLY SEATED IN THE METAL CAP AND IS SNUGLY FITTED NEXT TO THE PANEL LEGS.
3. USE TWO (2) WORKERS (OR MORE, DEPENDING ON SEAM LENGTH) TO INSTALL SEAMS; ONE WORKER (OR WORKERS) HOLDING ONE END OF THE SEAM AT AN ANGLE OFF THE ROOF SURFACE AND THE OTHER WORKER INSERTING THE SEAM OVER THE PANEL LEGS.

R. TEE-CLIP INSTALLATION:

1. THE CLIPS ARE TO BE INSTALLED AS SHOWN IN THE BERRIDGE TEE-PANEL DETAILS.
2. CLIP SPACING IS TYPICALLY TWENTY (20) INCHES ON CENTER. *

S. FASTENERS: INSTALL FASTENERS AS PER TYPICAL DETAILS. USE 11 GAUGE 1-1/4" GALVANIZED ROOFING NAILS FOR INSTALLATION OVER WOOD SHEATHING AND USE #10 PANCAKE HEAD TEKS FASTENERS (ZINC-PLATED SCREW WITH PHILLIPS INSERT, AS MADE BY CONSTRUCTION FASTENERS CO.) FOR INSTALLATION TO METAL.** WHEN USING POP RIVETS ON FLASHING, STAINLESS STEEL RIVETS ARE RECOMMENDED TO AVOID RUST RUST STAINS.

MAKE SURE ALL FASTENERS ARE DRIVEN STRAIGHT AND SET FLAT. DO NOT OVERDRIVE FASTENERS, AS THIS WILL CAUSE THE CLIP AND/OR FLASHINGS TO BUCKLE OR BECOME RECESSED BELOW THE ELEVATION OF THE SUBSTRATE.

T. UNDERWRITERS LABORATORIES RATINGS: THE BERRIDGE TEE-PANEL COMPLIES WITH THE FOLLOWING UL RATINGS:

1. NO. 580 "TEST FOR WIND UPLIFT RESISTANCE OF ROOF ASSEMBLIES" CLASS UL 90 CONSTRUCTION NUMBER 296. (REFER TO BERRIDGE TYPICAL DETAIL T-90)
2. UL FIRE-RESISTANT ROOF ASSEMBLIES: UL DESIGN NUMBERS P-224, 225, 227, 230, 237, 508, 510, 512, 701, 711, 713, 715, 717, 803, 814, 815, 819, 821. REFER TO BERRIDGE TYPICAL DETAILS T-91, T-92, AND T-93.

U. SEALANT RECOMMENDATIONS: TREMCO INC. SPECTREM 1 OR EQUAL.
DO NOT USE CLEAR CAULK.

* NOTE: IF LOCAL CODES OR OTHER REGULATIONS DICTATE SPECIFIC WIND UPLIFT REQUIREMENTS, CONSULT THE BERRIDGE ENGINEERING DEPARTMENT, AS IT MAY BE NECESSARY TO USE A DIFFERENT CLIP SPACING OR FASTENER.

** CONSULT BERRIDGE MANUFACTURING'S ENGINEERING DEPARTMENT REGARDING THE USE OF ANY OTHER TYPE OF FASTENER.



**BERRIDGE
MANUFACTURING
COMPANY**

INSTALLATION INSTRUCTIONS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
TI-4

BERRIDGE MANUFACTURING COMPANY STRIVES TO PROVIDE ITS CUSTOMERS WITH THE HIGHEST QUALITY STRETCHER LEVELED STEEL AVAILABLE. THE LATEST TECHNOLOGY IS ALSO INCORPORATED IN BERRIDGE'S HIGH-PRECISION COIL HANDLING AND ROLL FORMING EQUIPMENT TO MINIMIZE THE STRESS ON METAL DURING PRODUCTION. FURTHERMORE, BERRIDGE UTILIZES HEAVIER 24 GAUGE METAL RATHER THAN 26 GAUGE STEEL OR LIGHT GAUGE ALUMINUM AS OFFERED BY MANY COMPETITORS. ALL THESE MEASURES HAVE BEEN TAKEN TO MINIMIZE THE AMOUNT OF "OIL-CANNING" (WAVINESS) WHICH IS NATURALLY INHERENT IN FLAT SHEET METAL. MANY TIMES, HOWEVER, THE CAUSE OF WAVINESS OR "OIL-CANNING" CAN BE TRACED TO UNEVEN SHEATHING, IMPROPER FELT INSTALLATION, IMPROPER HANDLING, OR FOOT TRAFFIC ON THE PANELS.

ALL ARCHITECTURAL PANELS REQUIRE CARE IN HANDLING AND INSTALLATION TO AVOID DAMAGING OR DEFORMING THE PANELS.

THESE INSTALLATION INSTRUCTIONS AND THE FOLLOWING TYPICAL DETAILS ARE INTENDED TO PROVIDE OUR CUSTOMERS WITH THE INFORMATION REQUIRED FOR AN AESTHETICALLY PLEASING AND FUNCTIONAL INSTALLATION OF THE BERRIDGE TEE-PANEL SYSTEM.

NOTE: ALL PRODUCTS, SPECIFICATIONS, DETAILS, AND INSTRUCTIONS SUBJECT TO CHANGE WITHOUT NOTICE. FOR SPECIFIC PROJECT DETAILS, CONTACT BERRIDGE.




**BERRIDGE
MANUFACTURING
COMPANY**

INSTALLATION INSTRUCTIONS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
TI-5

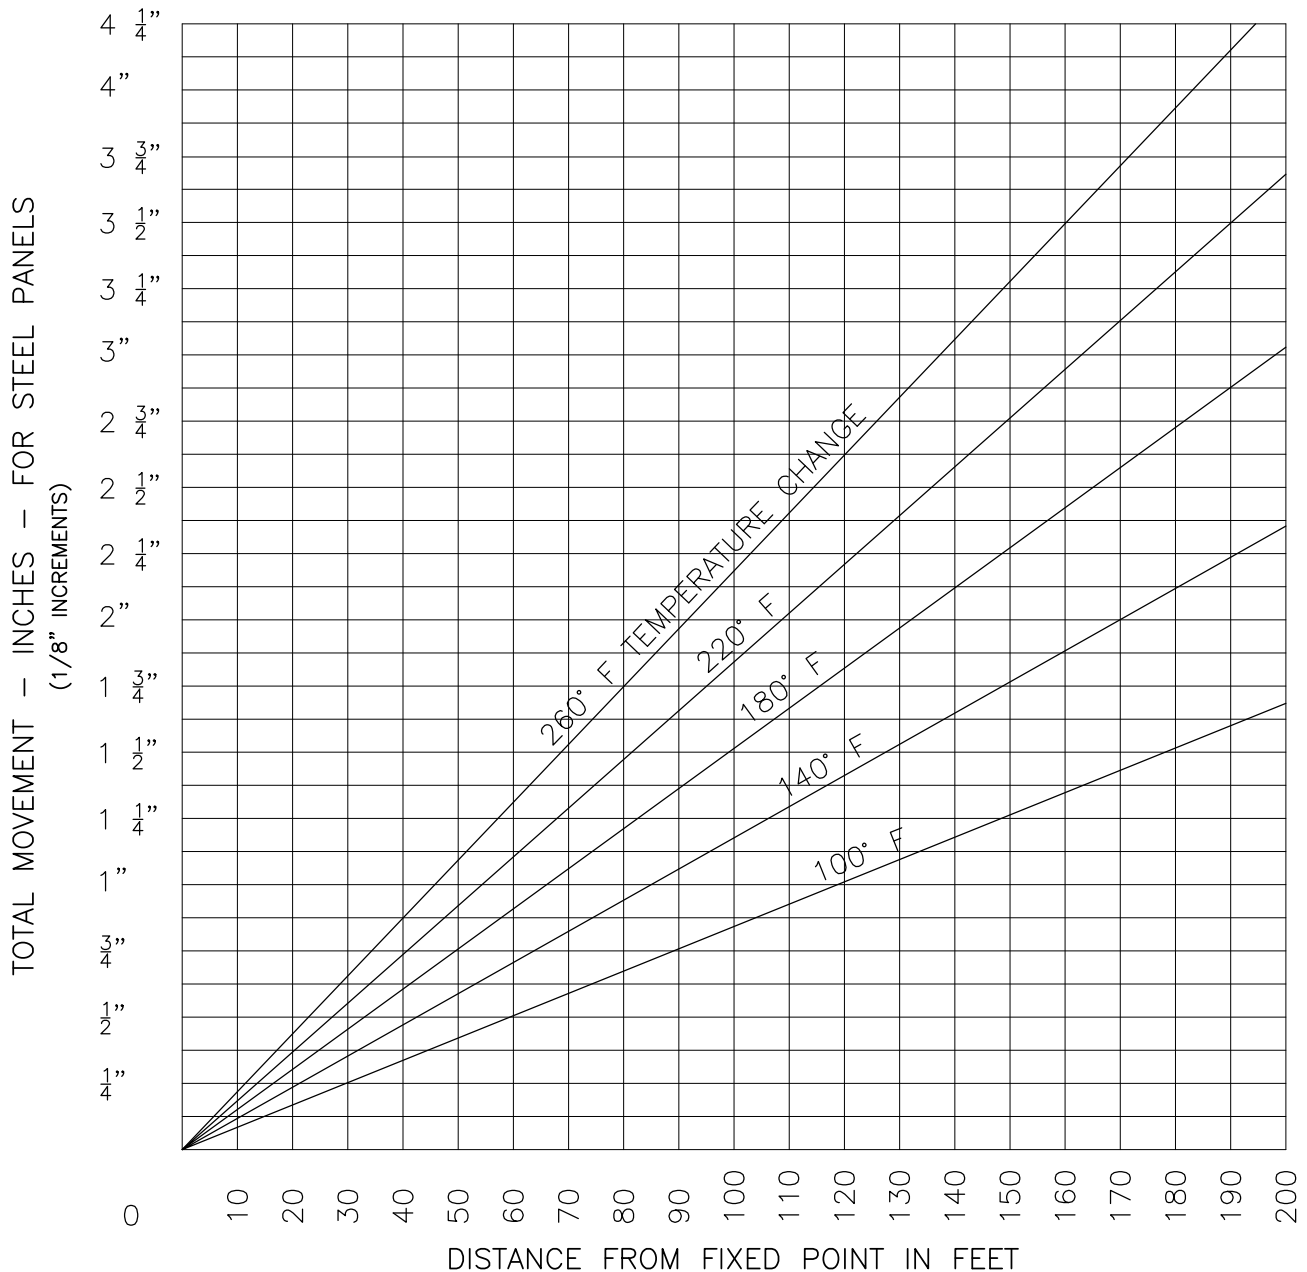

EXPANSION AND CONTRACTION OF METAL PANELS DUE TO LONGITUDINAL THERMAL MOVEMENT MUST BE CONSIDERED IN BOTH DESIGN AND INSTALLATION. THE ABOVE CHART EMPHASIZES THE NEED TO PROVIDE AMPLE CLEARANCES FROM GUTTERS, RIDGES, ENDWALL, ETC.

MAXIMUM TEMPERATURE SHOULD BE NO LOWER THAN 140°F FOR WHITE PANELS, UP TO 180° FOR DARK PAINTED PANELS, REGARDLESS OF AMBIENT MAXIMUM, MINIMUM SHOULD BE FIGURED WELL BELOW AMBIENT MINIMUM TO ALLOW FOR RADIATION TO NIGHT SKY. IN ANY CASE, A MINIMUM OF 100°F DIFFERENTIAL IS RECOMMENDED.




**BERRIDGE
MANUFACTURING
COMPANY**

INSTALLATION INSTRUCTIONS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
TI-6

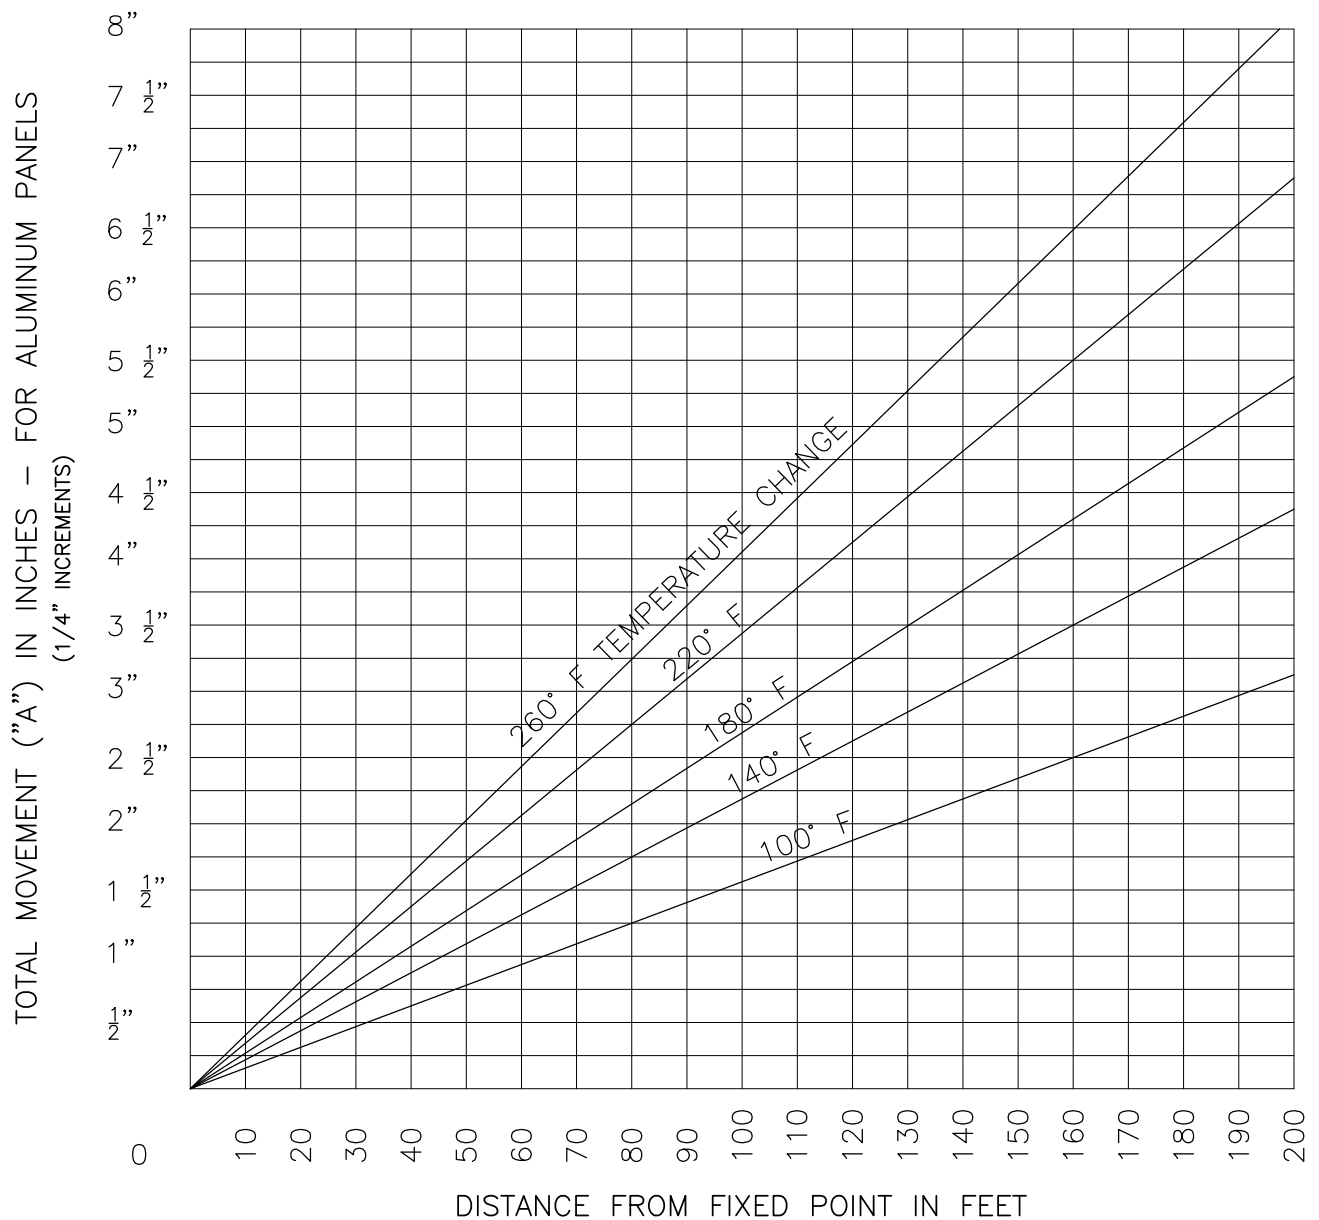

EXPANSION AND CONTRACTION OF ALUMINUM PANELS DUE TO LONGITUDINAL THERMAL MOVEMENT MUST BE CONSIDERED IN BOTH DESIGN AND INSTALLATION. THE ABOVE CHART EMPHASIZES THE NEED TO PROVIDE AMPLE CLEARANCES FROM GUTTERS, RIDGES, ENDWALL, ETC.

MAXIMUM TEMPERATURE SHOULD BE NO LOWER THAN 140°F FOR WHITE PANELS, UP TO 180° FOR DARK PAINTED PANELS, REGARDLESS OF AMBIENT MAXIMUM, MINIMUM SHOULD BE FIGURED WELL BELOW AMBIENT MINIMUM TO ALLOW FOR RADIATION TO NIGHT SKY. IN ANY CASE, A MINIMUM OF 100°F DIFFERENTIAL IS RECOMMENDED.



**BERRIDGE
MANUFACTURING
COMPANY**

INSTALLATION INSTRUCTIONS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
TI-6 (AL)

THE DETAILS CONTAINED IN THE FOLLOWING PAGES ARE MERELY RECOMMENDATIONS AS TO HOW BERRIDGE MANUFACTURING MATERIALS SHOULD BE INSTALLED. THEY MAY REQUIRE ADAPTATIONS OR MODIFICATIONS FOR A SPECIFIC PROJECT AS CONDITIONS VARY IN BOTH BUILDING DESIGN AND LOCAL WEATHER PECULIARITIES.

BERRIDGE MANUFACTURING COMPANY SHALL BE HELD HARMLESS FROM ANY AND ALL CLAIMS ARISING FROM LACK OF WATERTIGHTNESS AS A RESULT OF FOLLOWING THESE RECOMMENDED DETAILS. ENSURING WATERTIGHTNESS ON ANY GIVEN PROJECT IS THE FUNCTION OF THE INSTALLER. THE ARCHITECT/GENERAL CONTRACTOR/INSTALLER MUST ACCEPT THE RESPONSIBILITY TO ADAPT THESE DETAILS TO MEET PARTICULAR BUILDING REQUIREMENTS AND TO ASSURE ADEQUATE WATERTIGHTNESS.

THE INSTALLER CAN VIRTUALLY ASSURE WATERTIGHTNESS IF THESE FLASHING DETAILS HAVE BEEN PROPERLY ADAPTED, ADEQUATE LAPS HAVE BEEN PROVIDED, CORRECT TYPE OF SEALANT USED, ALL JOINT ADEQUATELY CAULKED AND PROFESSIONAL WORKMANSHIP EMPLOYED.





**BERRIDGE
MANUFACTURING
COMPANY**

INTRODUCTION TO TYPICAL DETAILS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-2

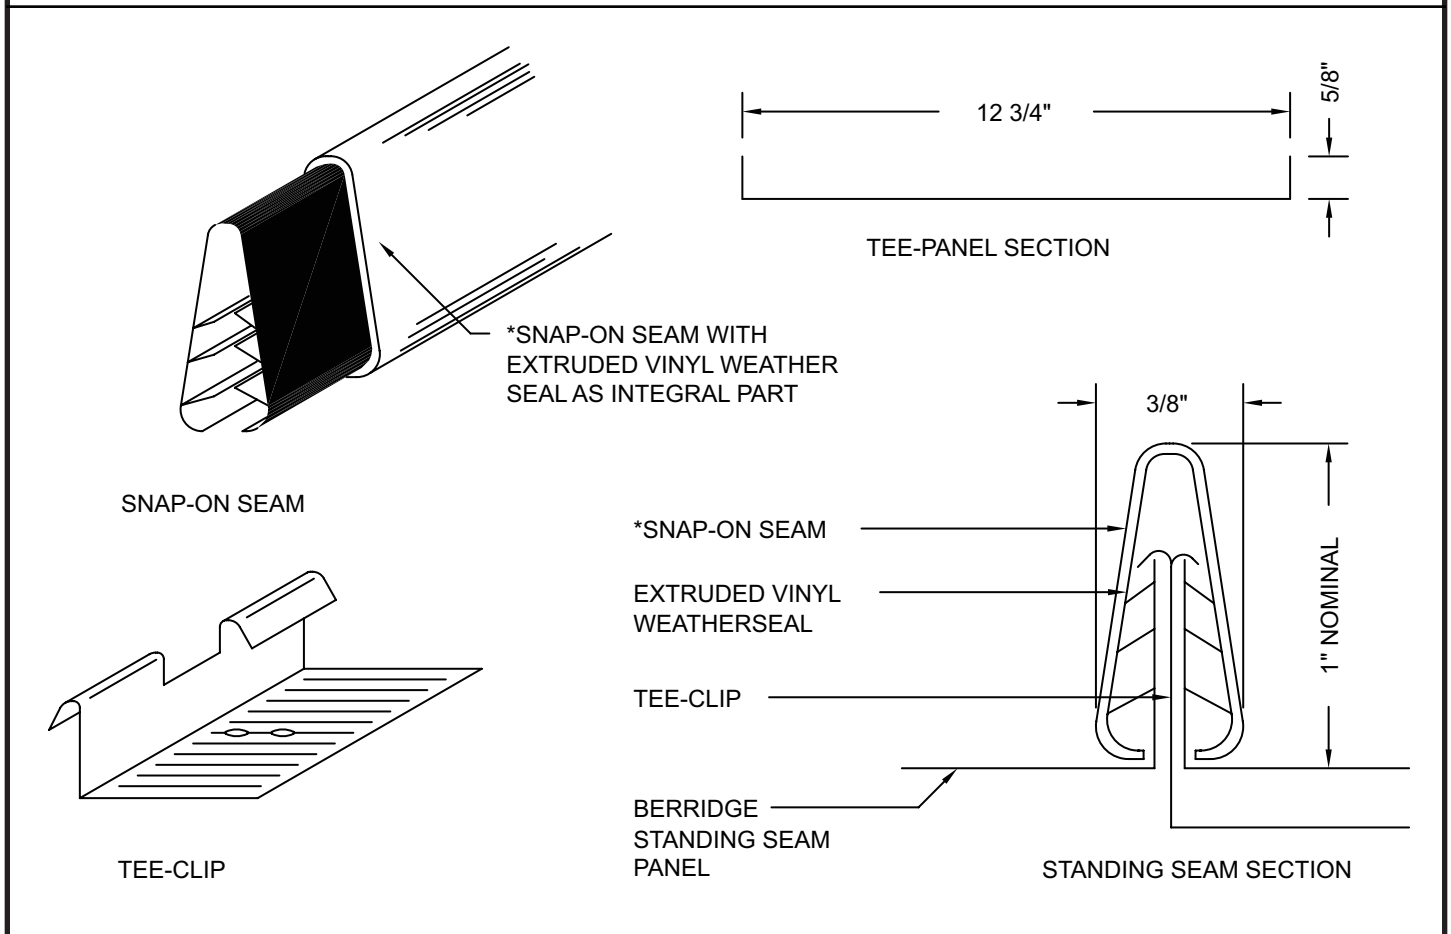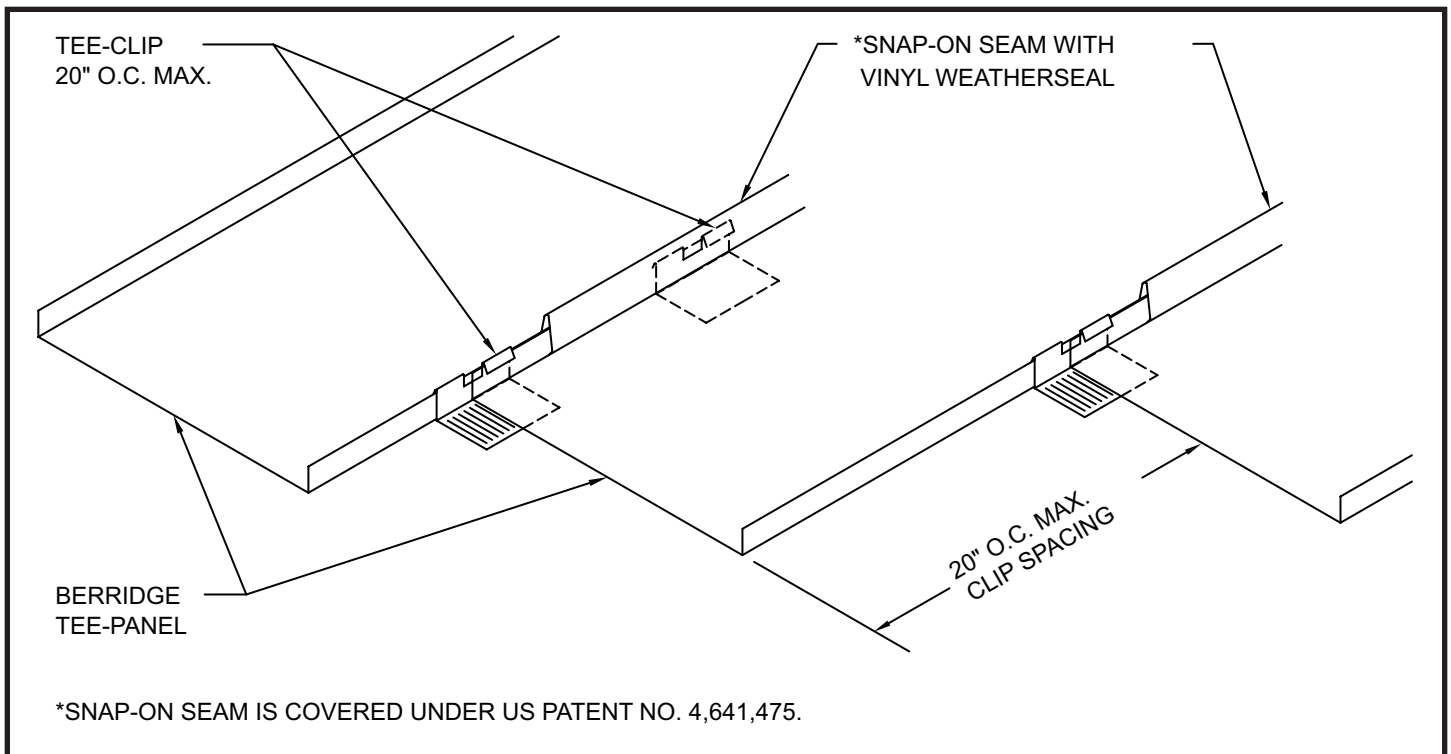

**BERRIDGE
MANUFACTURING
COMPANY**

OVERVIEW - TEE-PANEL STANDING SEAM SYSTEM

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-3

NOTE: THIS DETAIL FOR ROOFS WITH A SLOPE
GREATER THAN 3 ON 12

TURN DOWN UPPER PANEL AND LOCK ON TO
CONTINUOUS CLEAT ON LOWER PANEL



BERRIDGE TEE-PANEL

CONTINUOUS CLEAT ALLOW 1 5/8"
GAP AT ENDS NEXT TO LEGS

BERRIDGE TEE-PANEL

CONTINUOUS BEAD
OF CAULK

CONTINUOUS
CLEAT

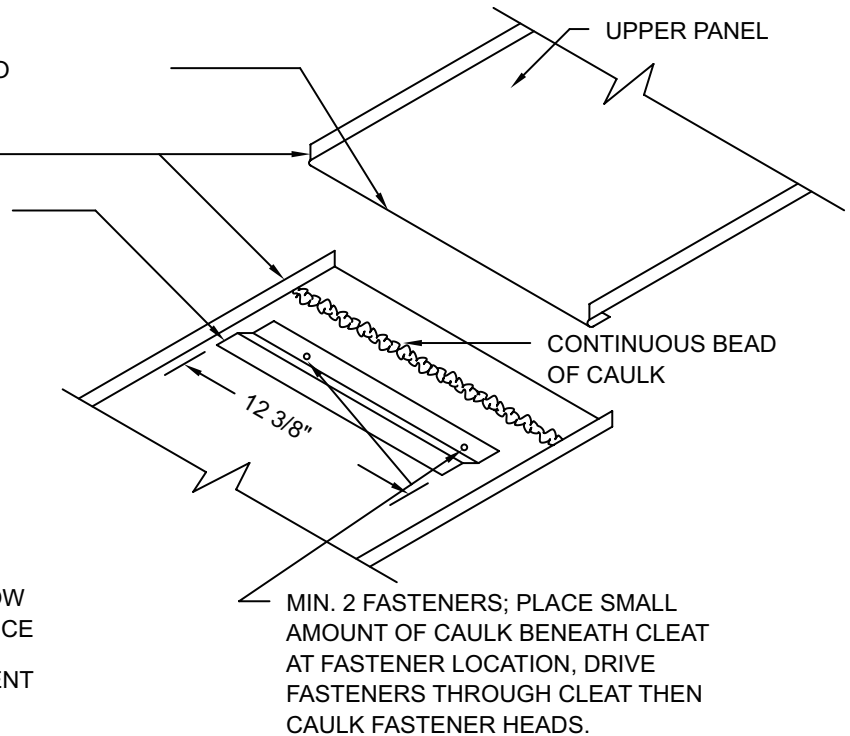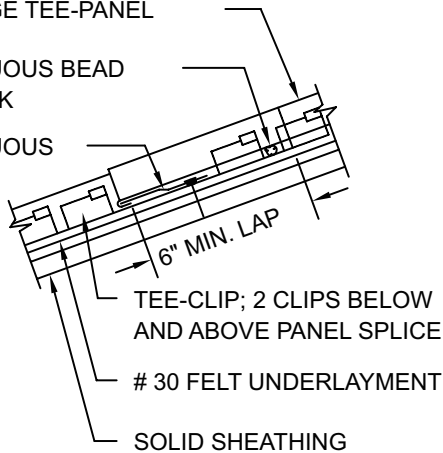

NOTE: THIS DETAIL FOR ROOFS WITH A SLOPE
BETWEEN 1 ON 12 AND 3 ON 12

TURN DOWN UPPER PANEL AND LOCK ON TO
CONTINUOUS CLEAT ON LOWER PANEL



BERRIDGE TEE-PANEL

CONTINUOUS CLEAT ALLOW 1 5/8"
GAP AT ENDS NEXT TO LEGS

BERRIDGE TEE-PANEL

TWO CONTINUOUS
BEADS OF CAULK

CONTINUOUS
CLEAT

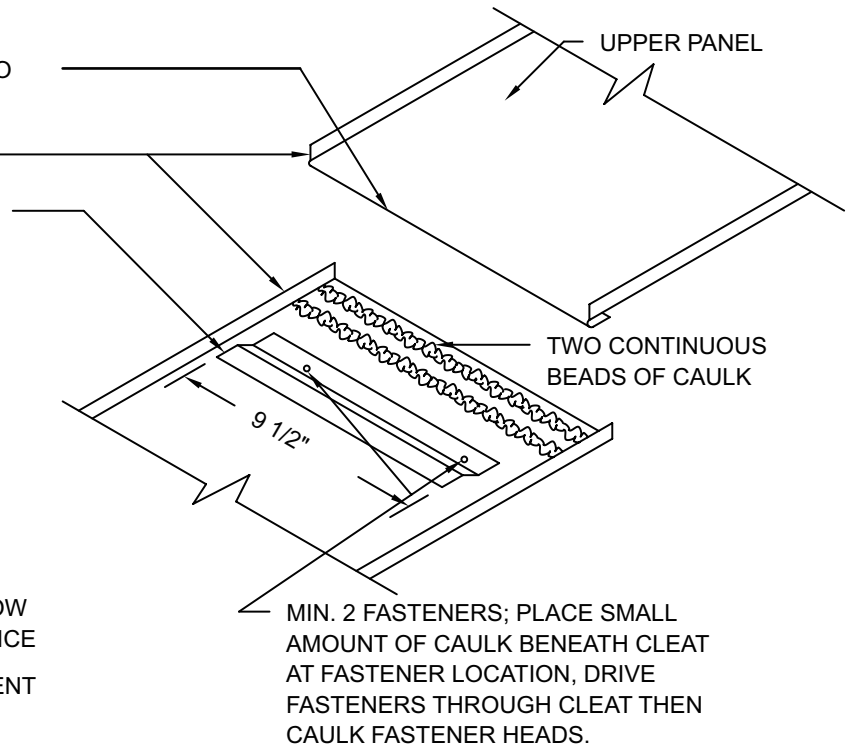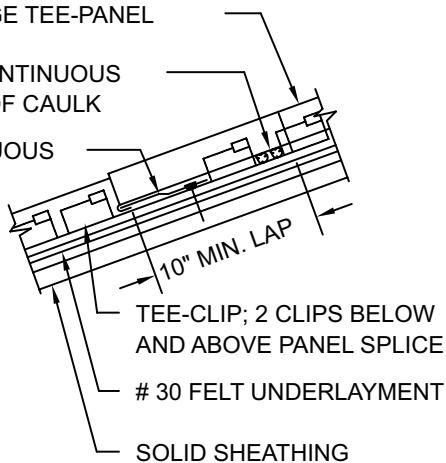

**BERRIDGE
MANUFACTURING
COMPANY**

TEE-PANEL SPLICE DETAIL

Tee-Panel System


DATE: 06-01-97

PAGE/FILE
T-4

*BERRIDGE SNAP-ON SEAM WITH VINYL WEATHER SEAL

CAULK AT END OF VINYL (CAULK SHOULD SEAL GAP BETWEEN THE TWO SEAMS)


SEAM SLEEVE; PLACE INTO SEAMS BETWEEN METAL AND VINYL, COLOR TO MATCH SEAMS. SLIDE SEAMS TOGETHER AND SNAP INTO PLACE

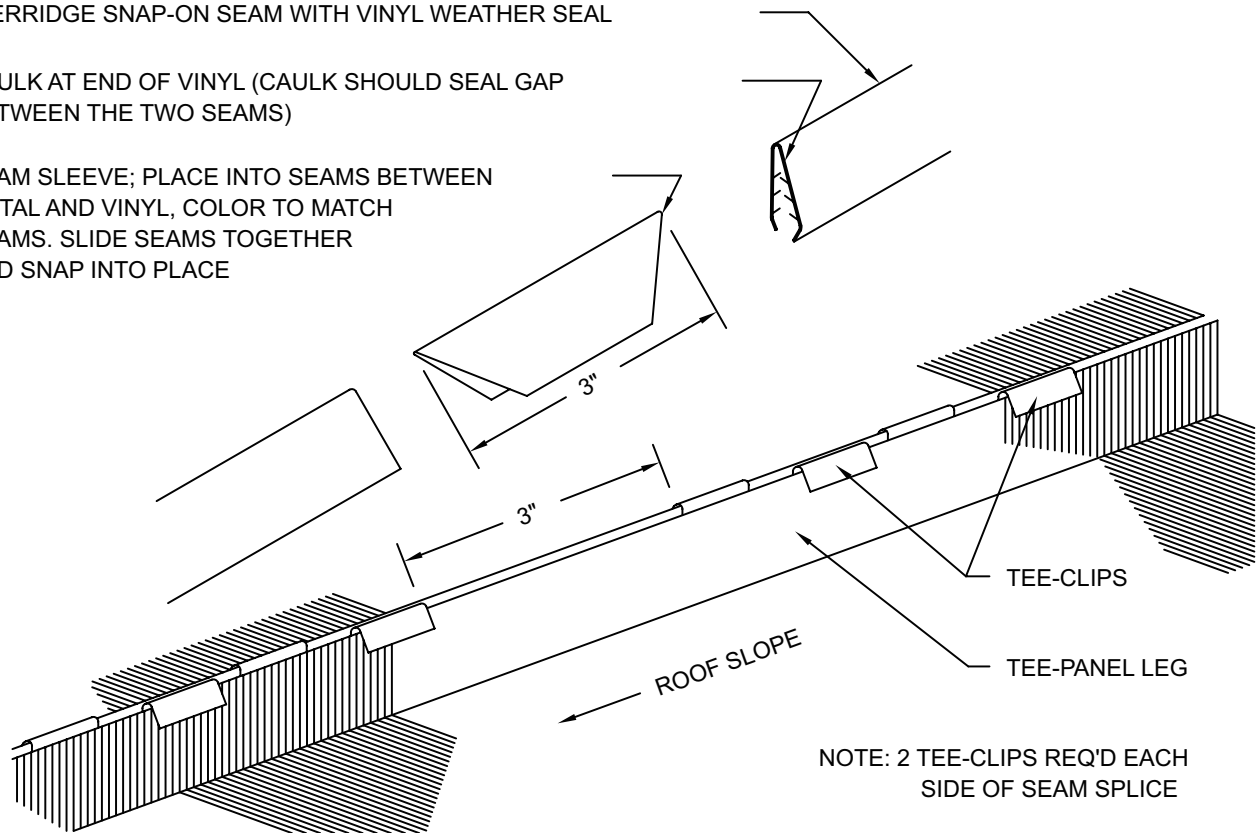

SEAM SLEEVE PLACED INTO SEAMS BETWEEN METAL AND VINYL BEFORE SEAMS ARE SNAPPED INTO PLACE ON TEE-PANEL LEG

*SNAP-ON SEAM

TEE-PANEL LEG

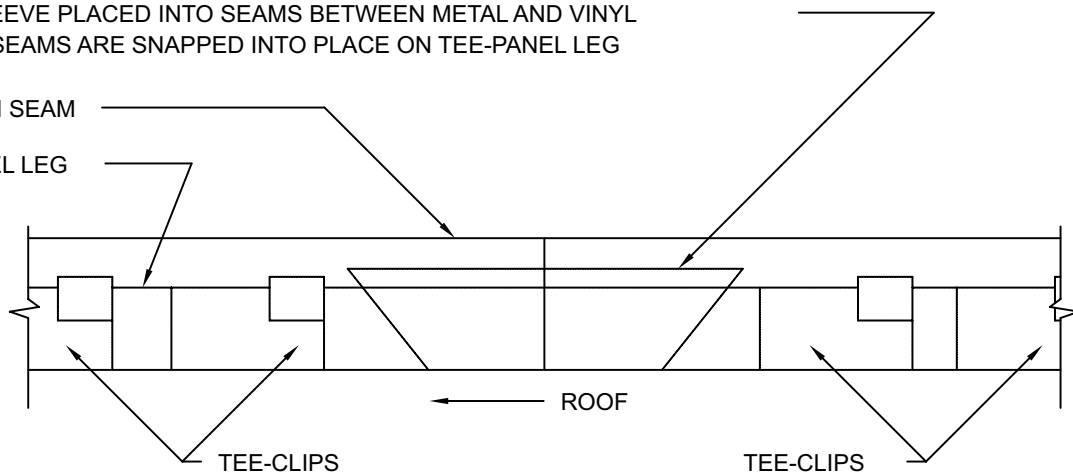

NOTE: 1) SPLICES IN SEAMS AND PANELS SHOULD BE STAGGERED.
NEVER SPLICE A PANEL AND A SEAM AT THE SAME LOCATION.

2) TWO TEE-CLIPS REQUIRED AT EACH SIDE OF SEAM SPLICE.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.



**BERRIDGE
MANUFACTURING
COMPANY**

SEAM SPLICE DETAIL

Tee-Panel System

DATE: 06-01-97


PAGE/FILE
T-5

***BERRIDGE SNAP-ON SEAM WITH VINYL WEATHER SEAL**

CAULK AT END OF VINYL (CAULK SHOULD SEAL GAP BETWEEN THE TWO SEAMS)

CUT VINYL WEATHER SEAL BACK 1/2"


CUT METAL OF SEAM AT AN ANGLE.
PLACE SEAM BETWEEN METAL AND VINYL OF OPPOSITE SEAM

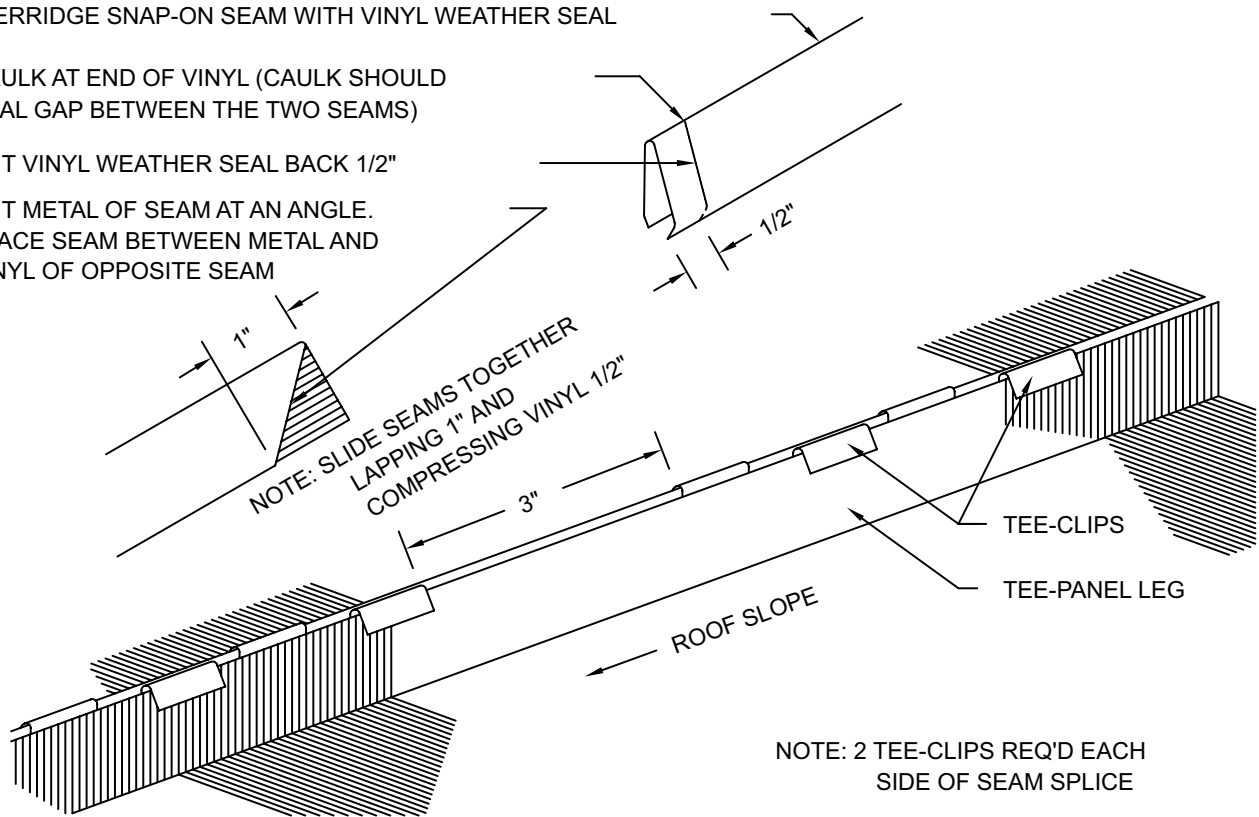

***SNAP-ON SEAM**

SEAM CUT AT ANGLE AND PLACED INTO OPPOSITE SEAM BETWEEN METAL AND VINYL

TEE-PANEL LEG

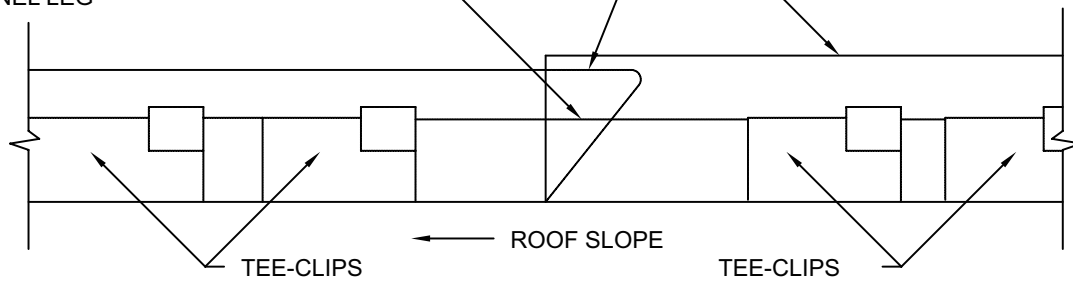

NOTE: 1) SPLICES IN SEAMS AND PANELS SHOULD BE STAGGERED.
NEVER SPLICE A PANEL AND A SEAM AT THE SAME LOCATION.

2) TWO TEE-CLIPS REQUIRED AT EACH SIDE OF SEAM SPLICE.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.



**BERRIDGE
MANUFACTURING
COMPANY**

ALTERNATE SEAM SLICE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-6

BERRIDGE TEE-PANEL

TEE-CLIPS

30 FELT UNDERLAYMENT


CONTINUOUS ZEE PURLIN

RIGID INSULATION
MATERIAL

CORRUGATED METAL
DECK

STRUCTURAL MEMBER


SEE ZEE PURLIN DETAIL BELOW

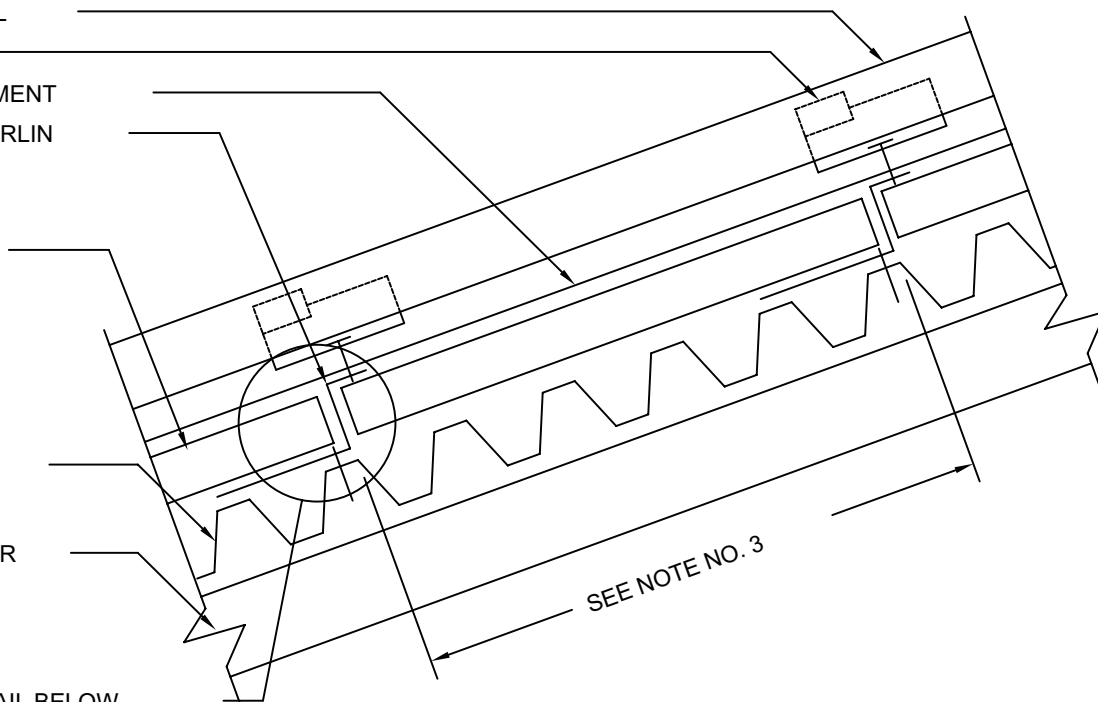

1. ALL FELT UNDERLAYMENT, STRUCTURAL MEMBERS, CORRUGATED DECK, AND INSULATING MATERIAL, ARE ITEMS TO BE FURNISHED AND INSTALLED BY OTHERS AT THE DISCRETION OF THE ARCHITECT.
2. CONTINUOUS WOOD BLOCKING (BY OTHERS) MAY BE USED IN LIEU OF ZEE PURLINS. BLOCKING MUST BE EXACT SAME DEPTH AS INSULATION.
3. PURLIN SPACING AND FASTENER TYPE WILL BE DEPENDENT ON GOVERNING CODE AND SPECIFICATION REQUIREMENTS. CONTACT BERRIDGE FOR SPECIFIC INFORMATION.
4. RIGID INSULATION MUST HAVE ADEQUATE COMPRESSIVE STRENGTH TO SUPPORT THE WEIGHT OF A 300 POUND MAN WITHOUT CAUSING ANY DEFORMATION IN THE PANEL.
5. DEPTH OF ZEE PURLINS MUST BE GOVERNED BY INSULATION THICKNESS. ANY DEVIATION COULD BE CAUSE FOR DAMAGE TO PANELS OR LEAKS.

ZEE PURLIN; MINIMUM 24 GAUGE STEEL, DEPTH
DETERMINED BY INSULATION DEPTH AND LEGS
DETERMINED BY PITCH OF METAL DECK

BUTT INSULATION UP TO PURLIN

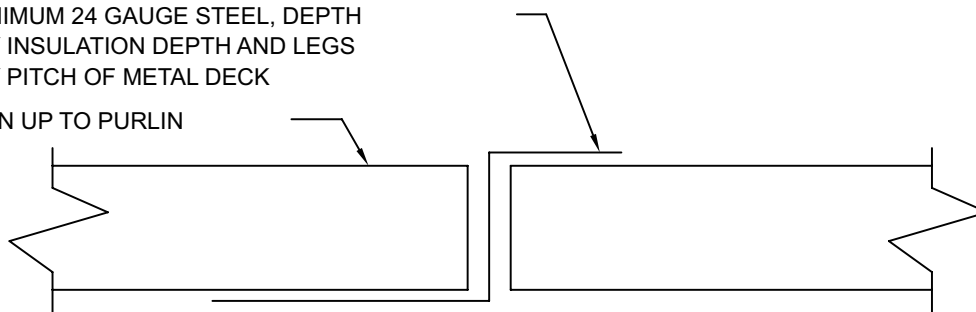

**BERRIDGE
MANUFACTURING
COMPANY**

INSULATED DECK DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-7

BERRIDGE TEE-PANEL LEG

TEE-CLIP; USE 2 AT EAVE

*SNAP-ON SEAM


NOTCH LEG AND FIELD FORM
PANEL PAN AROUND FLASHING

GAP; SEE NOTE 4 BELOW

MAXIMUM EXPANSION OF
PANEL + 1/2"


EAVE FLASHING, 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

*SNAP-ON SEAM IS COVERED UNDER
US PATENT NO. 4,641,475.

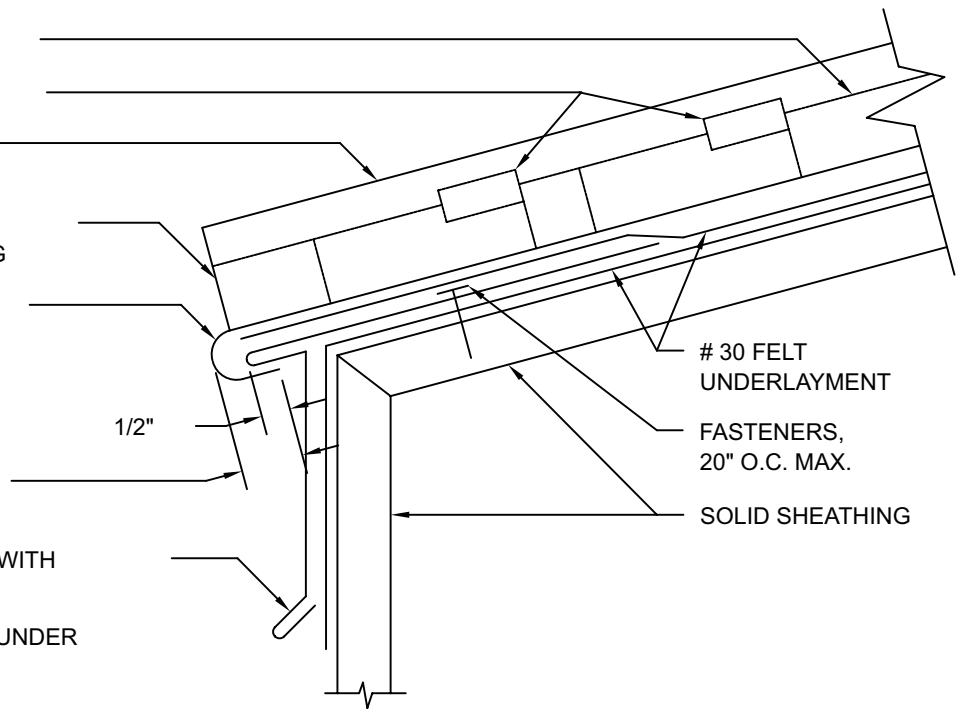

1. THIS DETAIL IS RECOMMENDED FOR AREAS WITH HEAVY SNOW LOADS OR WHERE EXPANSION AND CONTRACTION OF PANELS IS A DESIGN FACTOR.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING AND FASTENERS ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.
4. THE "GAP" BETWEEN EAVE FLASHING AND PANEL (SEE DETAIL ABOVE) CAN BE INCREASED TO ALLOW FOR LINEAR EXPANSION AND CONTRACTION OF PANELS. NOTE 1/2" OF PANEL PAN MUST BE ENGAGED WITH EAVE FLASHING WHEN PANEL HAS EXPANDED TO ITS MAXIMUM LENGTH. REFER TO DETAIL TI-6.
5. GAP BETWEEN EAVE FLASHING AND PANEL MUST BE ADJUSTED TO SUIT TEMPERATURE DURING INSTALLATION.

MAXIMUM EXPANSION OF
PANEL + 1/2"

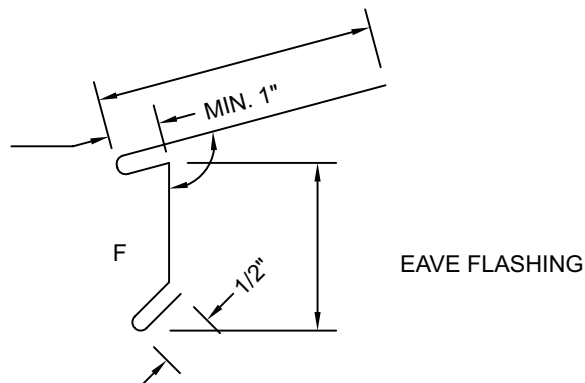

F = FINISH SIDE



**BERRIDGE
MANUFACTURING
COMPANY**

EAVE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-10

BERRIDGE TEE-PANEL LEG

*SNAP-ON SEAM

TEE CLIP; USE 2 AT EAVE

FASTENERS; 20" O.C. MAX.

SOLID SHEATHING

EAVE FLASHING; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

CHANNEL (COLOR IN)

FIELD CUT AND FORM PANEL PAN
AROUND EAVE FLASHING


FASTENERS; 20" O.C. MAX.

BERRIDGE FASCIA PANEL


30 FELT
UNDERLAYMENT

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. AS ROOF PANELS ARE INSTALLED, SNIP APPROXIMATELY 3/8" SECTION FROM EACH PANEL LEG AT EAVE, AND FORM PANEL PAN AROUND EAVE FLASHING.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

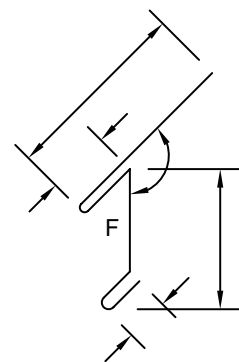

EAVE FLASHING

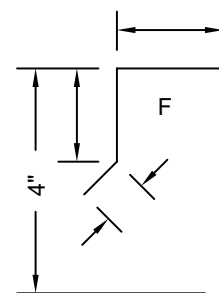

CHANNEL

F = FINISH SIDE



**BERRIDGE
MANUFACTURING
COMPANY**

EAVE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-11

BERRIDGE TEE-PANEL LEG

*SNAP-ON SEAM

TEE-CLIP; USE 2 AT EAVE

DRIP FLASHING; 4" END LAP WITH
CONTINUOUS CAULK AT LAPS

30 FELT UNDERLAYMENT

FIELD CUT AND FORM
PANEL PAN AROUND
EAVE FLASHING SEE ALSO
DETAIL T-11

SPECIAL ZEE CLOSURE;
CUT TO FIT BETWEEN
PANEL SEAMS

POP RIVET; 40" O.C. MAX.

BERRIDGE TEE-PANEL
TEE-CLIP

SOLID SHEATHING

FASTENERS;
20" O.C. MAX.


FASTENERS; 3 PER
ZEE CLOSURE MIN.

CONTINUOUS CAULK
BETWEEN ZEE
CLOSURE, TEE-PANEL
AND SEAM


*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. AS ROOF PANELS ARE INSTALLED, SNIP A SECTION FROM EACH PANEL LEG AT EAVE AND FORM THE PAN AROUND THE DRIP FLASHING.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

F = FINISH SIDE

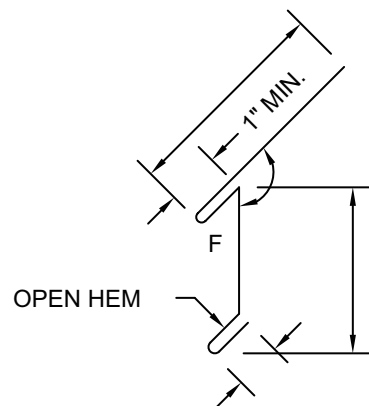

DRIP FLASHING

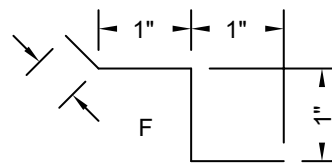

SPECIAL ZEE CLOSURE



**BERRIDGE
MANUFACTURING
COMPANY**

EAVE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-12

RIDGE/HIP CAP; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS.
POP RIVET TO ZEE CLOSURE
40" O.C. MAX.

BERRIDGE TEE-PANEL LEG

*SNAP-ON SEAM

TEE-CLIPS;
20" O.C. MAX.

ZEE CLOSURE (CUT TO
FIT BETWEEN SEAMS)

FASTENERS; MIN. 2 PER
ZEE CLOSURE

CONTINUOUS BEAD OF CAULK
BETWEEN ZEE CLOSURE,
TEE-PANEL AND SEAM


CAULK RIVET HEADS

30 FELT UNDERLAYMENT
SOLID SHEATHING


*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT ZEE CLOSURES TO FIT BETWEEN SEAMS.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELTING UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

F = FINISH SIDE

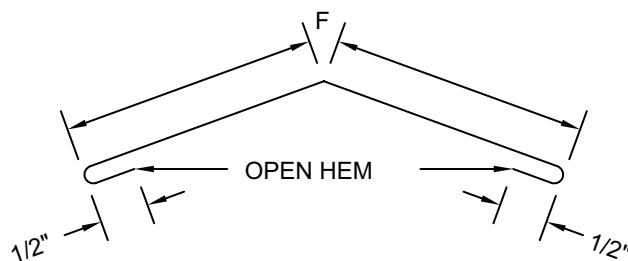

RIDGE/HIP CAP

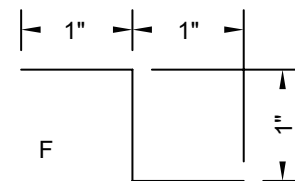

ZEE CLOSURE



**BERRIDGE
MANUFACTURING
COMPANY**

RIDGE AND HIP DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-20

RIDGE CAP; 4" END LAPS WITH CONTINUOUS CAULK AT LAPS, POP RIVET TO ZEE CLOSURE AT 40" O.C. MAX. CAULK RIVET HEADS

BERRIDGE TEE-PANEL LEG

*SNAP-ON SEAM

ZEE CLOSURE
(CUT TO FIT BETWEEN SEAMS)

TEE-CLIP; 20" O.C. MAX.


CONTINUOUS BEAD OF CAULK BETWEEN ZEE CLOSURE, TEE-PANEL AND SEAM

LAP FELT OVER RIDGE

FASTENERS; MIN. 2
PER ZEE CLOSURE


FASTENERS; 40" O.C.
MAX. CAULK
FASTENER HEAD

30 FELT
UNDERLAYMENT
SOLID SHEATHING

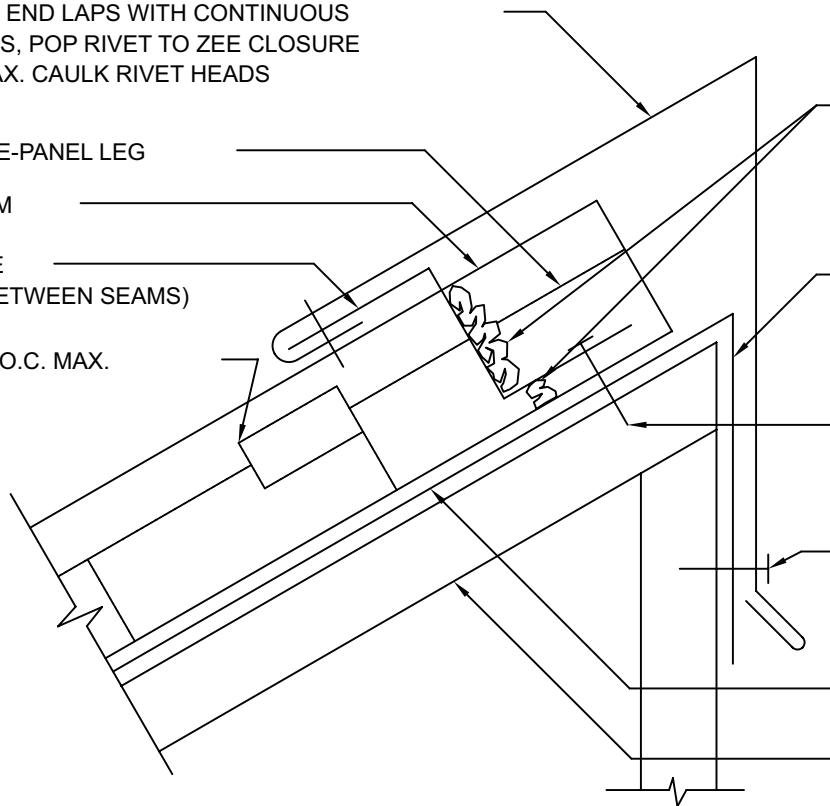


*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT ZEE CLOSURE TO FIT BETWEEN SEAMS.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

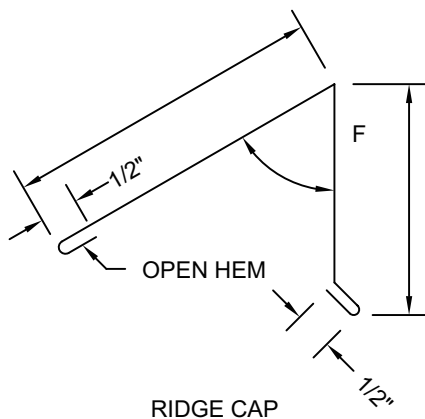

F = FINISH SIDE

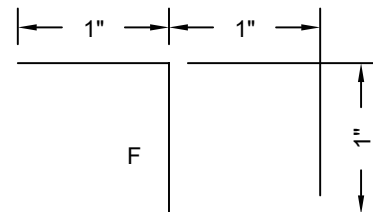

ZEE CLOSURE



**BERRIDGE
MANUFACTURING
COMPANY**

SHED ROOF RIDGE CAP DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-21

SECTION VIEW

FIELD FORM END OF RIDGE FLASHING
AND EXTEND UNDER CONTINUOUS CLEAT

RIDGE FLASHING; 4" END LAPS
WITH CONTINUOUS CAULK AT LAPS

FIELD TAPERED ZEE CLOSURE
WITH CONTINUOUS CAULK UNDER
ZEE CLOSURE

T-20

SOLID SHEATHING

VALLEY FLASHING; 12" LAPS WITH
CONTINUOUS CAULK AT LAPS

CONTINUOUS CLEAT;
DO NOT CAULK ON
OR UNDER CLEAT

*SNAP-ON SEAM

TEE-CLIPS;
2 AT END OF SEAM

30 FELT
UNDERLAYMENT

FASTENERS; 20" O.C. MAX.
PLACE A DAB OF CAULK
AT FASTENER LOCATION
DRIVE FASTENER AND
CAULK FASTENER HEAD

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

PLAN VIEW

MAIN ROOF
PANELS

RIDGE FLASHING

CONTINUOUS CLEAT

VALLEY FLASHING

DORMER PANEL



**BERRIDGE
MANUFACTURING
COMPANY**

RIDGE TERMINATION AT DORMER VALLEY

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-22

*SNAP-ON SEAM

TEE-CLIP; 20" O.C. MAX.

FIELD CUT LAST PANEL AND FORM
AROUND DRIP FLASHING (PANEL TO BE
CONTINUOUS FROM RIDGE TO EAVE)

CONTINUOUS BEAD OF CAULK

DRIP FLASHING; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

TOP LAYER OF FELT TO BE
PARALLEL WITH ROOF SLOPE


30 FELT
UNDERLAYMENT

SOLID SHEATHING

FASTENERS; 20" O.C.
MAX. STAGGERED

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT AND FORM LAST PANEL AROUND DRIP FLASHING. PANEL MUST BE CONTINUOUS FROM RIDGE TO EAVE.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

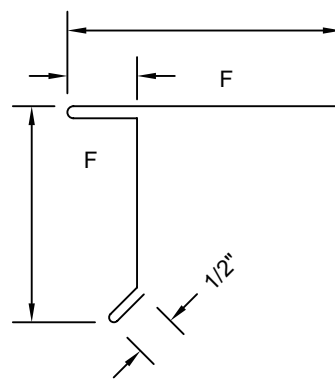

F = FINISH SIDE

DRIP FLASHING



**BERRIDGE
MANUFACTURING
COMPANY**

GABLE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-30

*SNAP-ON SEAM

TEE-CLIP; 20" O.C. MAX.

FIELD CUT LAST PANEL AND FORM AROUND
DRIP FLASHING (PANEL MUST BE CONTINUOUS
FROM RIDGE TO EAVE)

CONTINUOUS BEAD OF CAULK
FASTENERS; MIN. 3 PER
ZEE CLOSURE

GABLE FLASHING; POP RIVET TO
ZEE CLOSURE 40" O.C. MAX. WITH 4"
END LAPS WITH CONTINUOUS CAULK
AT LAPS.

SPECIAL ZEE CLOSURE;
CUT TO FIT BETWEEN SEAMS
BERRIDGE TEE-PANEL

30 FELT UNDERLAYMENT

SOLID SHEATHING

TOP LAYER OF FELT
TO BE PARALLEL
WITH ROOF SLOPE

30 FELT UNDERLAYMENT



FASTENERS; 20" O.C.
MAX. STAGGERED

CONTINUOUS BEAD OF CAULK
BETWEEN ZEE CLOSURE,
TEE-PANEL AND SEAM

TEE-CLIP 20" O.C. MAX.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT AND FORM LAST PANEL AROUND GABLE FLASHING PANEL MUST BE CONTINUOUS RIDGE TO EAVE.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

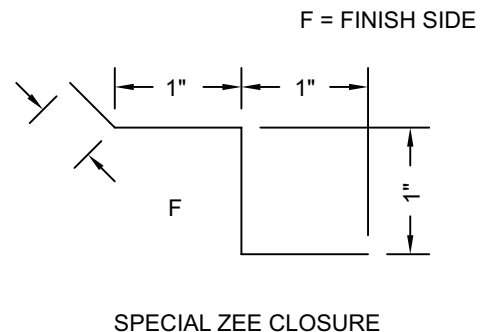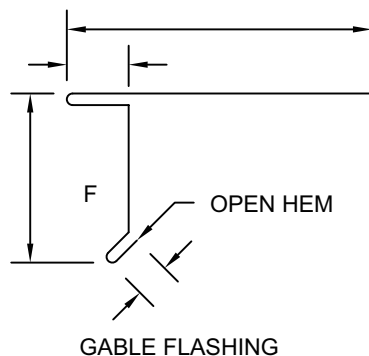

**BERRIDGE
MANUFACTURING
COMPANY**

GABLE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-31

*SNAP-ON SEAM

TEE-CLIP; 20" O.C. MAX.


FIELD CUT LAST PANEL AND SLIP INTO J-CLIP
(PANEL MUST BE CONTINUOUS FROM RIDGE TO
EAVE)

CONTINUOUS BEAD OF CAULK

J-CLIP; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS



DRIP FLASHING; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

SOLID SHEATHING

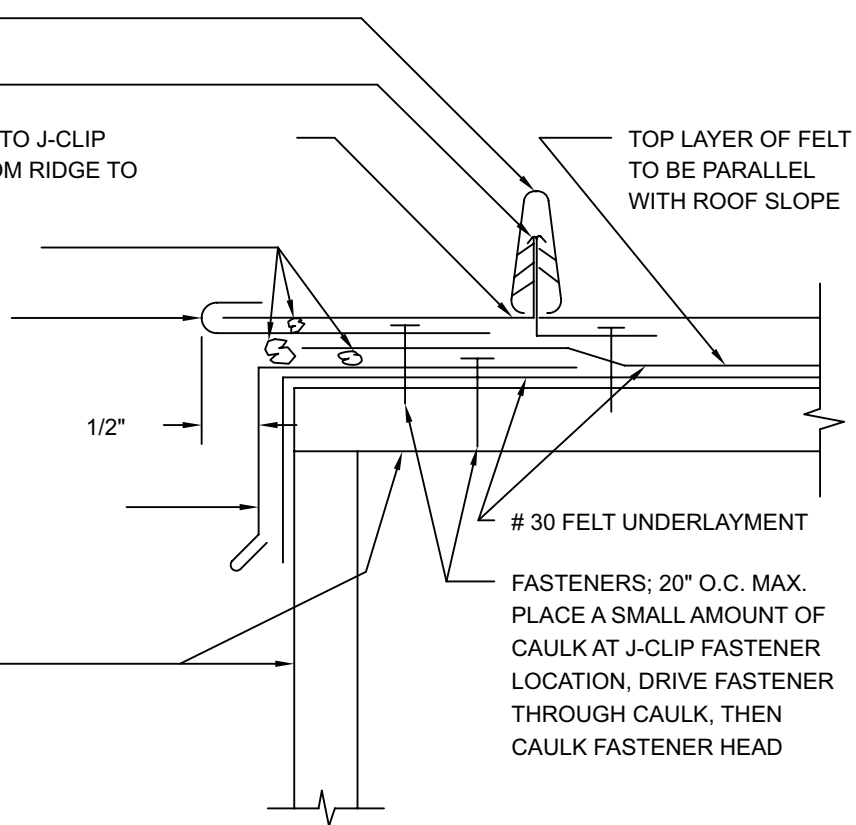

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT LAST PANEL AND SLIP INTO J-CLIP. PANEL MUST BE CONTINUOUS RIDGE TO EAVE.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

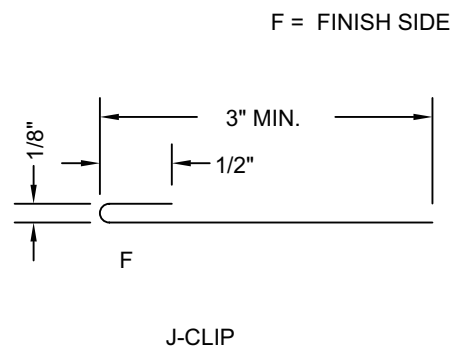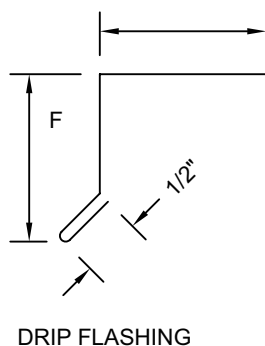

**BERRIDGE
MANUFACTURING
COMPANY**

GABLE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-32

*SNAP-ON SEAM

TEE-CLIP; 20" O.C. MAX.

FIELD CUT LAST PANEL AND SLIP INTO J-CLIP
(PANEL MUST BE CONTINUOUS FROM RIDGE TO
EAVE)

CONTINUOUS BEAD OF CAULK

J-CLIP; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

SPECIAL CHANNEL CLOSURE
4" END LAPS WITH CONTINUOUS
CAULK AT LAPS

BERRIDGE FASCIA PANEL

30 FELT UNDERLAYMENT

SOLID SHEATHING


TOP LAYER OF FELT
TO BE PARALLEL
WITH ROOF SLOPE

30 FELT UNDERLAYMENT


FASTENERS; 20" O.C. MAX.
PLACE A SMALL AMOUNT OF
CAULK AT J-CLIP FASTENER
LOCATION, DRIVE FASTENER
THROUGH CAULK, THEN
CAULK FASTENER HEAD.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT LAST PANEL AND SLIP INTO J-CLIP. PANEL MUST BE CONTINUOUS RIDGE TO EAVE.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

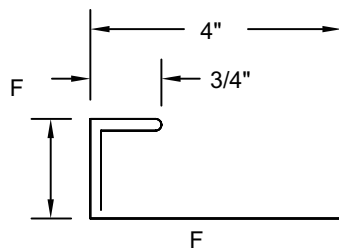

SPECIAL CHANNEL CLOSURE

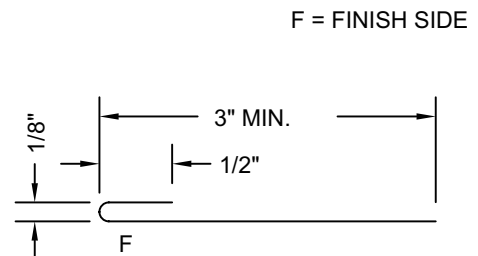

J-CLIP



**BERRIDGE
MANUFACTURING
COMPANY**

GABLE DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-33

CAP FLASHING; 4" END LAPS WITH CONTINUOUS CAULK AT LAPS. POP RIVET TO COUNTER FLASHING 40" O.C. MAX. CAULK ALL RIVET HEADS.

FASTENERS; 20" O.C. MAX.

COUNTERFLASHING; 4" END LAPS WITH CONTINUOUS CAULK AT LAPS. POP RIVET TO ZEE CLOSURE 40" O.C. MAX.

SUB-FLASHING; 4" END LAPS WITH CONTINUOUS CAULK AT LAPS.

30 FELT UNDERLAYMENT

BERRIDGE TEE-PANEL LEG

ZEE CLOSURE; CUT TO FIT BETWEEN SEAMS

*SNAP-ON SEAM

TEE-CLIP; 20" O.C. MAX.

FASTENERS AT LAPS AND STAGGERED; 20" O.C. AND CAULK FASTENER HEADS

30 FELT UNDERLAYMENT

FASTENERS; 40" O.C. MAX. CAULK FASTENER HEADS


CONTINUOUS BEAD OF CAULK BETWEEN ZEE CLOSURE, TEE-PANEL AND SEAM

SOLID SHEATHING

FASTENERS; MIN. 2 PER ZEE CLOSURE

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT ZEE CLOSURES TO FIT BETWEEN SEAMS.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

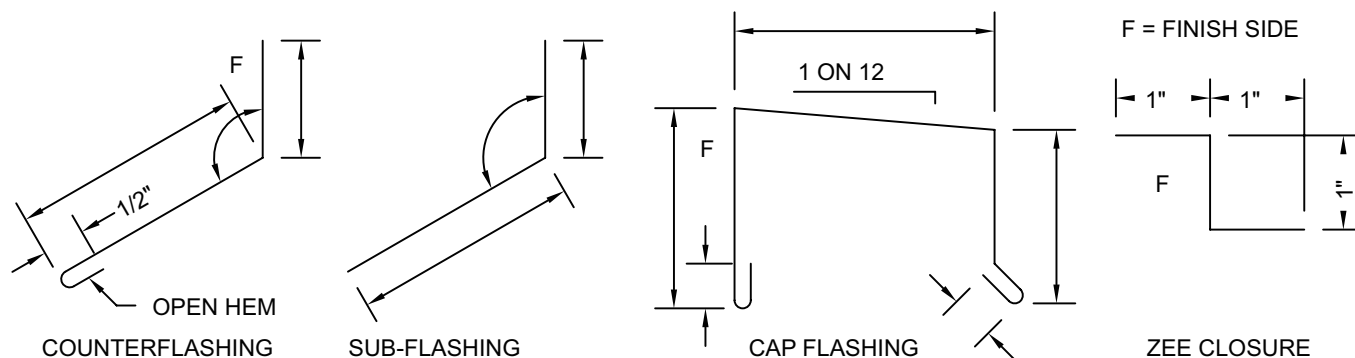

**BERRIDGE
MANUFACTURING
COMPANY**

PARAPET DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-40

BERRIDGE FASCIA PANEL

COUNTERFLASHING; 4" END LAPS
WITH CONTINUOUS CAULK AT LAPS.
POP RIVET TO ZEE CLOSURE 40"
O.C. MAX.

SUB-FLASHING; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

BERRIDGE TEE-PANEL LEG

ZEE CLOSURE; CUT TO FIT
BETWEEN SEAMS

*SNAP-ON SEAM

TEE-CLIP; 20" O.C. MAX.


30 FELT UNDERLAYMENT

FASTENERS; 20" O.C. MAX.




CONTINUOUS BEAD OF
CAULK BETWEEN ZEE
CLOSURE, TEE PANEL
AND SEAM

FASTENERS; MIN. 2 PER
ZEE CLOSURE

SOLID SHEATHING

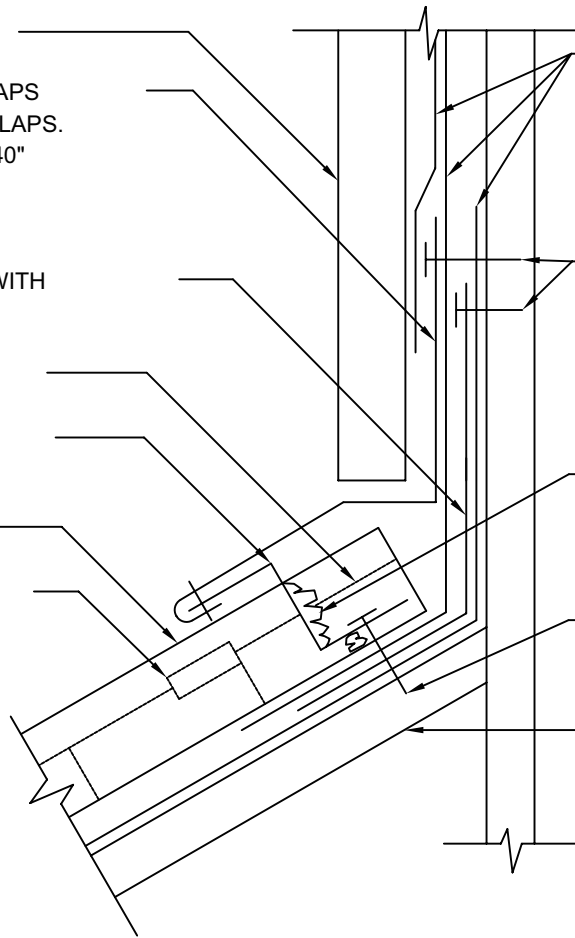

1. FIELD CUT ZEE CLOSURES TO FIT BETWEEN SEAMS.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

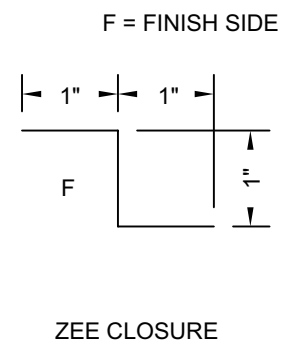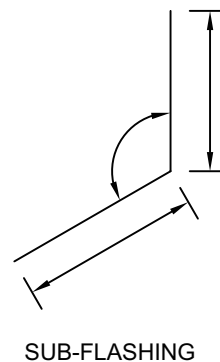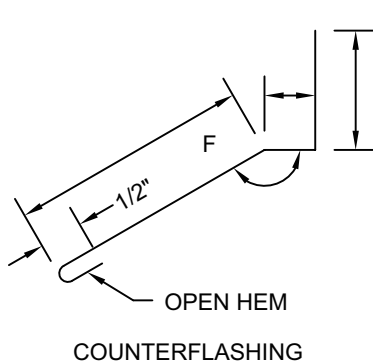

**BERRIDGE
MANUFACTURING
COMPANY**

HEAD WALL DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-50

30 FELT UNDERLAYMENT

BERRIDGE FASCIA PANEL

FASTENERS; 20" O.C. MAX.

FLASHING; 4" END LAPS WITH CONTINUOUS CAULK AT LAPS

CONTINUOUS BEAD OF CAULK

*SNAP-ON SEAM

BERRIDGE TEE-PANEL; START HERE OR FIELD CUT LAST PANEL AND FORM NEW LEG. PANEL TO BE CONTINUOUS FROM RIDGE TO EAVE.

FASTENERS; 20" O.C. MAX.

30 FELT UNDERLAYMENT

TOP FELT LAYER TO RUN PARALLEL WITH ROOF SLOPE

SOLID SHEATHING




CLOSURE CHANNEL; 4" END LAPS WITH CONTINUOUS CAULK AT LAPS

SUB-FLASHING; 4" END LAPS WITH CONTINUOUS CAULK AT LAPS

2 CONTINUOUS BEADS OF CAULK

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT LAST PANEL AND FORM NEW LEG. PANEL MUST BE CONTINUOUS RIDGE TO EAVE.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

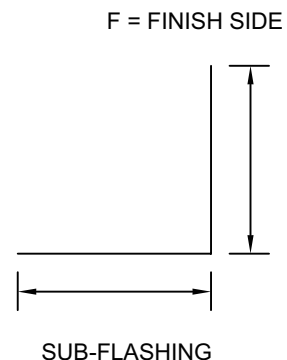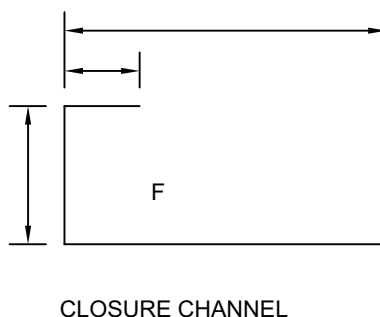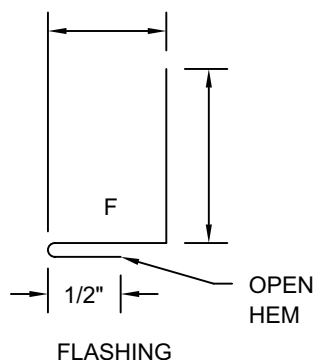

BERRIDGE
MANUFACTURING
COMPANY

RAKE WALL DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-51

REGLET FLASHING; 4" END LAPS
WITH CONTINUOUS CAULK AT LAPS

FASTENERS; 20" O.C. MAX.

COUNTERFLASHING; 4" END LAPS
WITH CONTINUOUS CAULK AT LAPS.
POP RIVET TO ZEE CLOSURE 40"
O.C. MAX.

SUB-FLASHING; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS.

30 FELT UNDERLAYMENT

BERRIDGE TEE-PANEL LEG

ZEE CLOSURE; CUT TO FIT
BETWEEN SEAMS

TEE-CLIP; 20" O.C. MAX.

*SNAP-ON SEAM

REGLET

CONTINUOUS CAULK
AT REGLET

CONTINUOUS BEAD
OF CAULK

CONTINUOUS BEAD OF
CAULK BETWEEN ZEE
CLOSURE, TEE PANEL
AND SEAM


FASTENERS; MIN. 2
PER ZEE CLOSURE

SOLID SHEATHING


FASTENERS; 20" O.C.
MAX.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.


1. FIELD CUT ZEE CLOSURES TO FIT BETWEEN SEAMS.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

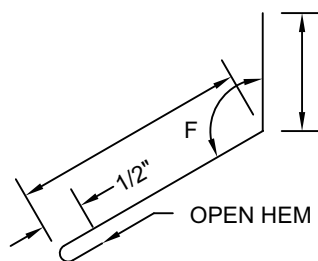


COUNTERFLASHING

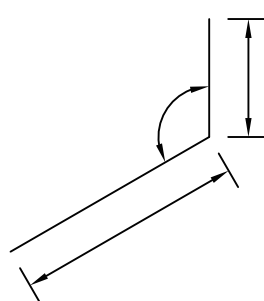

SUB-FLASHING

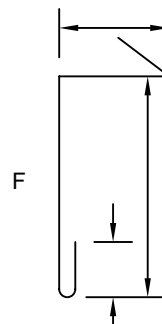

REGLET FLASHING

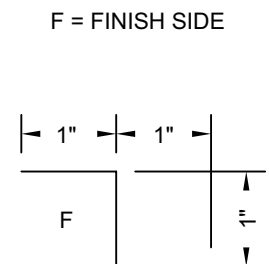

ZEE CLOSURE



BERRIDGE
MANUFACTURING
COMPANY

HEAD WALL DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-52

REGLET FLASHING; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

FASTENERS; 20" O.C. MAX.

SUB-FLASHING; 4" END LAPS WITH
CONTINUOUS CAULK AT LAPS

BERRIDGE TEE-PANEL; FIELD CUT LAST
PANEL AND FORM NEW LEG. PANEL TO
BE CONTINUOUS RIDGE TO EAVE.

TOP LAYER OF FELT TO BE PARALLEL
WITH ROOF SLOPE

30 FELT UNDERLAYMENT

*SNAP-ON
SEAM

REGLET

CONTINUOUS CAULK
AT REGLET

CONTINUOUS BEAD
OF CAULK


FASTENERS; 20"
O.C. MAX.

SOLID SHEATHING


TEE-CLIP; 20" O.C. MAX.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

1. FIELD CUT LAST PANEL AND FORM NEW LEG. PANEL MUST BE CONTINUOUS RIDGE TO EAVE.
2. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.



SUB-FLASHING

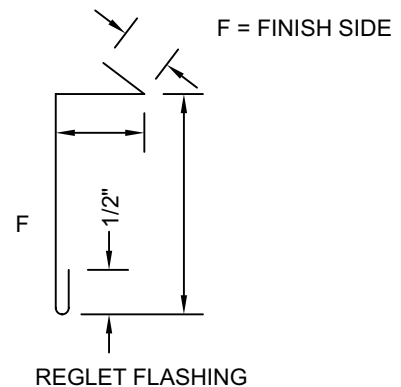

REGLET FLASHING



**BERRIDGE
MANUFACTURING
COMPANY**

RAKE WALL DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-53

TOP FELT LAYER TO
RUN PARALLEL WITH
ROOF SLOPE

30 FELT
UNDERLAYMENT

SOLID SHEATHING

CLOSURE CHANNEL

EAVE FLASHING

FASCIA BOARD

SNIP PANEL LEG AND FIELD FORM
PANEL PAN AROUND EAVE FLASHING

BERRIDGE TEE-PANEL

FASCIA

SEE DETAIL BELOW
FOR CAULKING AT
THIS LOCATION

EAVE FLASHING;
FORM LEG ON END
OF FLASHING AND
PUSH INTO CORNER

30 FELT UNDERLAYMENT;
CARRY FELT UP RAKE
WALL

RAKE WALL

SOLID SHEATHING

CAULK AT CORNER

FASCIA BOARD



**BERRIDGE
MANUFACTURING
COMPANY**

RAKE AT EAVE

USE THIS DETAIL AT RAKE DETAILS, T-51 & T-53

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-54

TEE-CLIPS; 2 AT END OF PANEL

FASTENERS; 20" O.C. MAX.

CONTINUOUS CLEAT

BERRIDGE TEE-PANEL LEG

FIELD NOTCH AND BEVEL
CUT SEAM

1 ON 12 MIN. SLOPE
AWAY FROM CLEAT

TRANSITION FLASHING; 4"
END LAPS WITH CONTINUOUS
CAULK AT LAPS. POP RIVET
TO ZEE CLOSURE 40" O.C. MAX.

FASTENERS; MIN. 2 PER
ZEE CLOSURE

CAULK POP
RIVET HEADS

LOWER
PANEL

SOLID SHEATHING

ZEE CLOSURE CUT TO
FIT BETWEEN SEAMS

*SNAP-ON
SEAM

UPPER PANEL

30 FELT
UNDERLAYMENT

SUB-FLASHING; 4" END
LAPS WITH CONTINUOUS
CAULK AT LAPS

FASTENERS; 40" O.C.


CONTINUOUS BEAD OF
CAULK BETWEEN ZEE
CLOSURE, TEE-PANEL
AND SEAM

NOTE: PLACE A DAB OF CAULK AT
CLEAT FASTENER LOCATION, DRIVE
FASTENER THROUGH CAULK, AND CAULK
FASTENER HEADS.


DO NOT: RUN A CONTINUOUS BEAD OF
CAULK ON CLEAT OR UNDER CLEAT

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.


1. FIELD CUT ZEE CLOSURE TO FIT BETWEEN SEAMS.
2. AS ROOF PANELS ARE INSTALLED, SNIP APPROXIMATELY 3/8" SECTION FROM EACH PANEL LEG AT UPPER PANEL.
3. AS SEAMS ARE INSTALLED ON UPPER ROOF PANELS, FIELD NOTCH AND BEVEL CUT EACH SEAM.
4. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
5. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

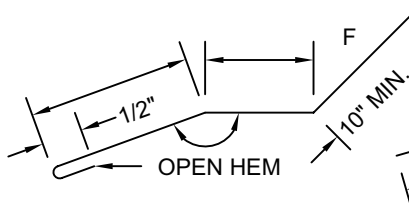

TRANSITION FLASHING

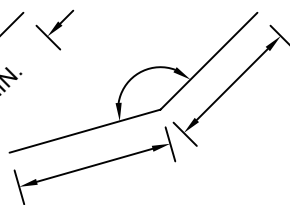


SUB-FLASHING

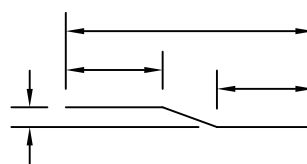

CONTINUOUS CLEAT

F = FINISH SIDE



ZEE CLOSURE



**BERRIDGE
MANUFACTURING
COMPANY**

SLOPE TRANSITION DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-60

TEE-CLIPS; 2 ABOVE TRANSITION

EDGE OF VERTICAL SEAM (INSERTED
INTO MITER JOINT)


*SNAP-ON SEAM; MITER

BERRIDGE TEE-PANEL LEG


FOLDING TEE-CLIPS;
2 BELOW TRANSITION
SEE DETAIL T-63

SPECIAL CHANNEL CLOSURE
LEAVE 1/8" GAP BETWEEN EACH
FLASHING SECTION

*SNAP-ON SEAM IS COVERED
UNDER US PATENT NO. 4,641,475.

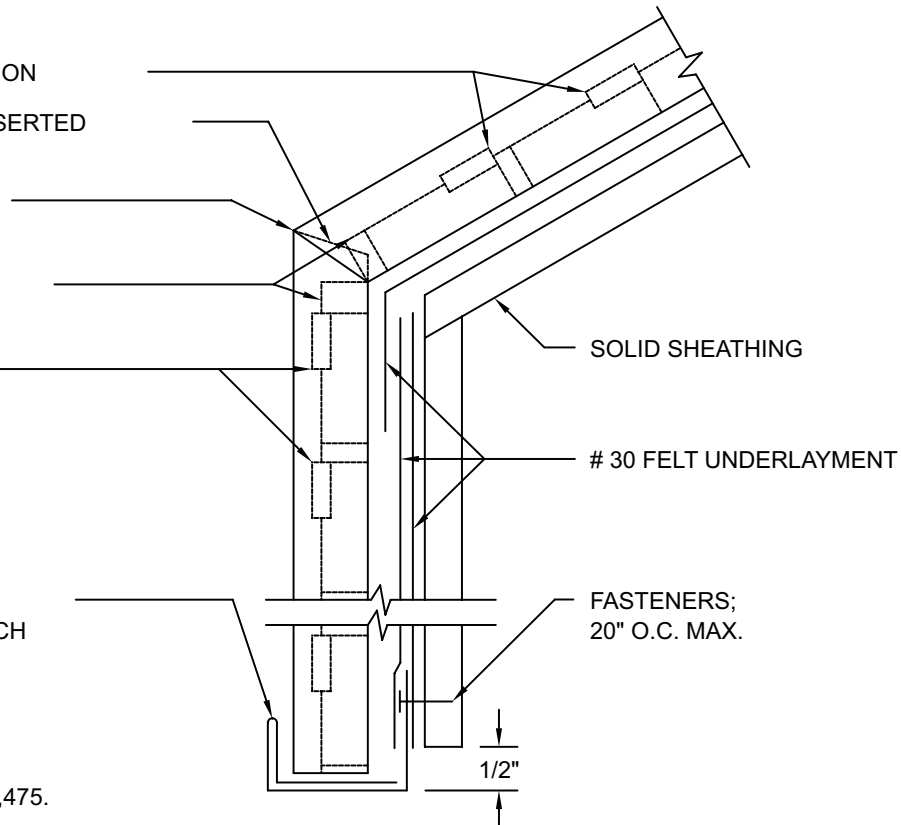

1. FIELD CUT PANEL LEG AND BEND PANEL AS REQUIRED FOR CHANGE IN SLOPE FROM ROOF TO FASCIA.
2. FIELD MITER SNAP-ON SEAM TO SLOPE CHANGE.
3. ONLY ONE SLOPE TRANSITION PER PANEL IS RECOMMENDED.
4. SEE SLOPE TRANSITION ISOMETRIC FOR ROOF TO FASCIA FOR CAULK AND SNAP-ON SEAM MITER DETAIL. (DETAIL T-62)
5. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
6. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

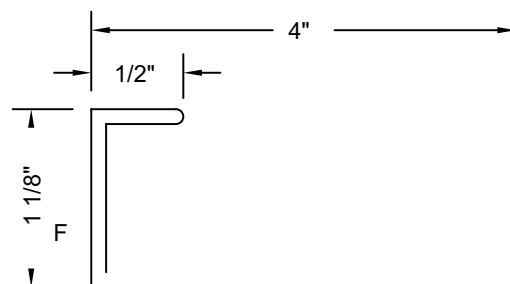

F = FINISH SIDE

SPECIAL CHANNEL CLOSURE



**BERRIDGE
MANUFACTURING
COMPANY**

SLOPE TRANSITION DETAIL ROOF TO FASCIA - A

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-61

ENSURE LOWER SEAM
IS INSIDE UPPER

BERRIDGE
*SNAP-ON SEAM

SPECIAL CHANNEL CLOSURE

TEE-CLIPS;
2 ABOVE TRANSITION


CAULK BETWEEN
PANEL LEGS

FIELD BEND PANEL
TO DESIRED ANGLE

FIELD CUT PANEL
LEGS

FOLDING TEE-CLIPS;
2 BELOW TRANSITION
SEE DETAIL T-63

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

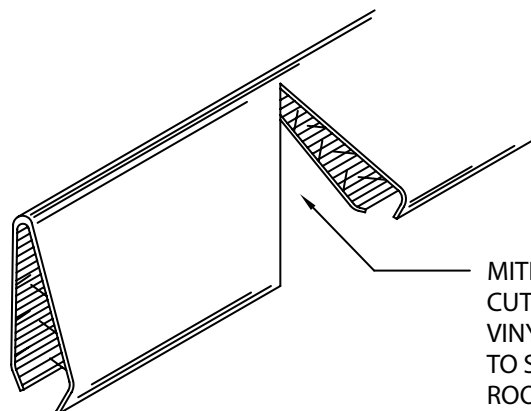

MITER SNAP-ON SEAM BY "V"
CUTTING SNAP ON SEAM AND
VINYL WEATHER SEAL. BEND
TO SLOPE TRANSITION OF
ROOF TO FASCIA.




**BERRIDGE
MANUFACTURING
COMPANY**

SLOPE TRANSITION DETAIL ROOF TO FASCIA - B


Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-62

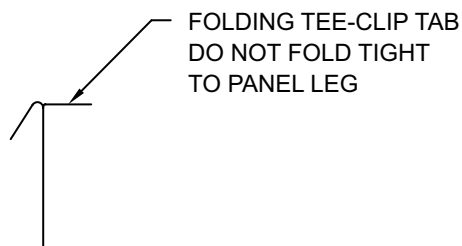


FOLDING TEE-CLIP
AS PROVIDED FROM
FACTORY

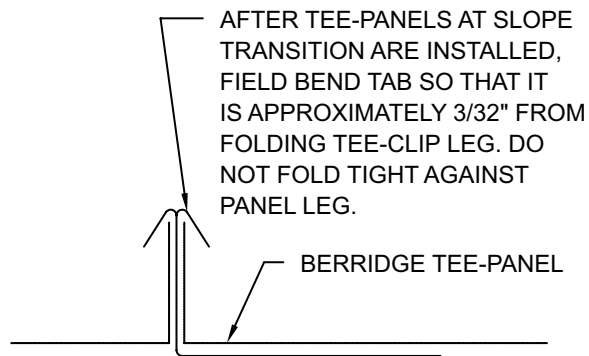

FOLDING TEE-CLIP
AS INSTALLED
20" O.C. MAX.

1. AFTER FOLDING TEE-CLIPS AND TEE-PANELS ARE INSTALLED, FIELD BEND FOLDING THE CLIP TAB SO THAT IT IS APPROXIMATELY 3/32" FROM CLIP LEG. DO NOT BEND TAB TIGHT AGAINST PANEL LEG AS VINYL INSERT IN SEAM WILL THEN NOT GRIP THE EDGE OF THE TAB.
2. USE FOLDING TEE-CLIP AT SLOPE TRANSITION (ROOF TO FASCIA, SEE DETAILS T-61 AND T-62). USE STANDARD TEE-CLIP THROUGHOUT REST OF STANDARD TEE PANEL SYSTEM.

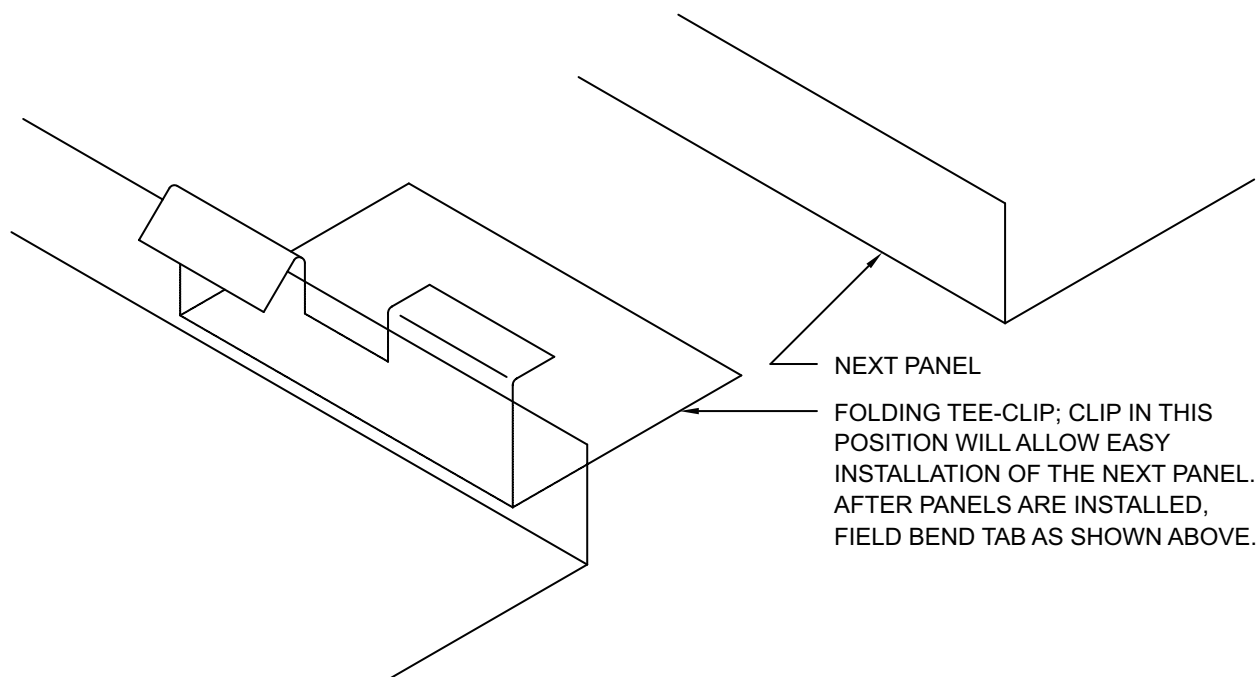

**BERRIDGE
MANUFACTURING
COMPANY**

FOLDING TEE-CLIP INSTALLATION

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-63

***SNAP-ON SEAM**

TEE-CLIPS; PLACE 2 TEE-CLIPS ABOVE VALLEY FLASHING (SEE VALLEY ISOMETRIC T-71) DO NOT USE FASTENERS IN TEE-CLIPS OVER VALLEY FLASHING.

CONTINUOUS CLEAT; WITH FASTENERS 20" O.C. MAX.

BERRIDGE TEE-PANEL LEG


CONTINUOUS BEAD OF CAULK BETWEEN VALLEY FLASHING AND FELT UNDERLAYMENT

VALLEY FLASHING

SOLID SHEATHING


SEE DETAIL T-71 FOR VALLEY FLASHING LAPPING.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

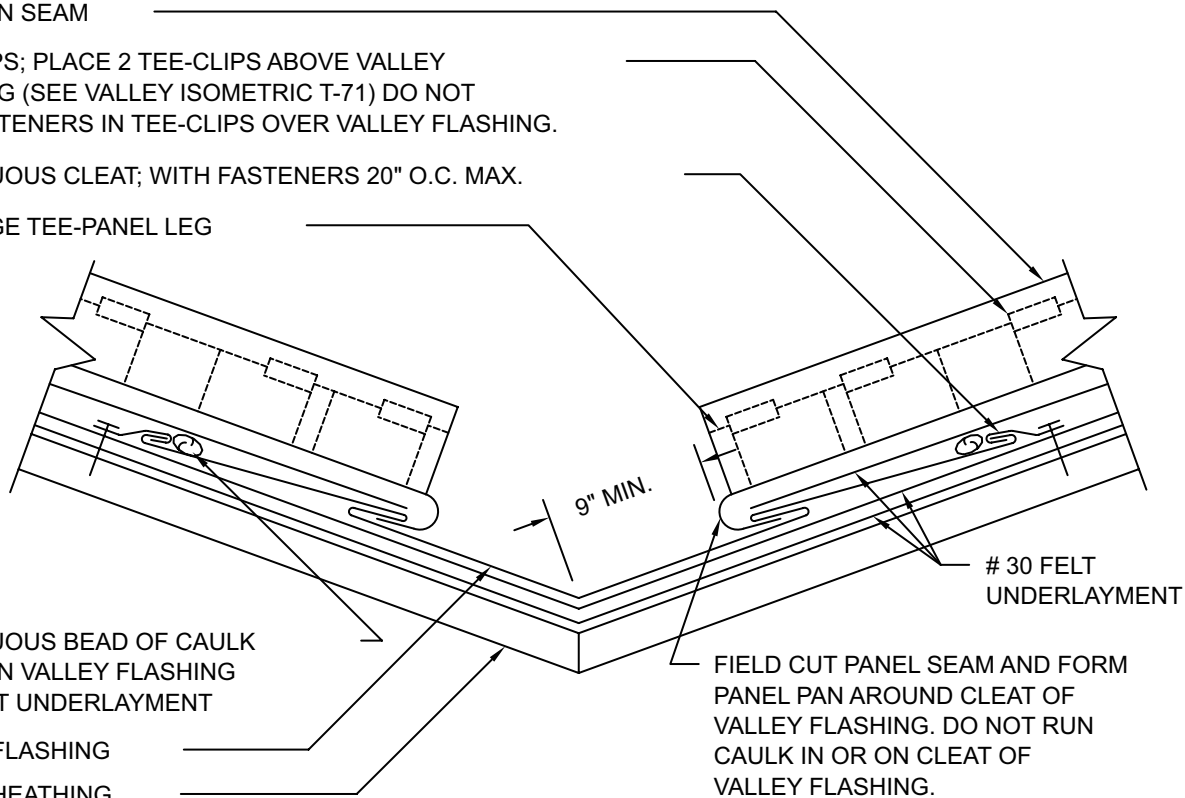


1. FOR EXPANSION AND CONTRACTION OF PANELS, SEE TI-6 AND T-11.
2. SOLID SHEATHING (BY OTHERS) TO BE A MINIMUM OF 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
3. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

F = FINISH SIDE

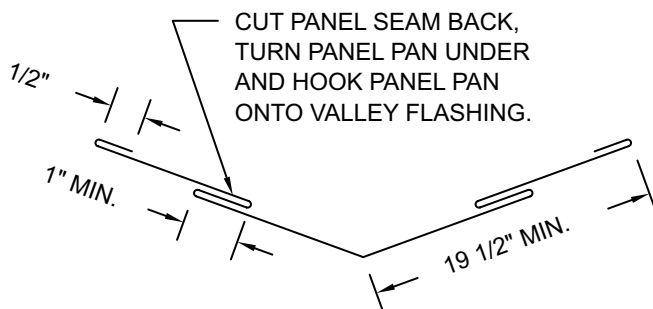

VALLEY FLASHING

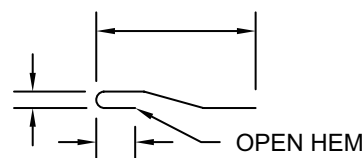

CONTINUOUS CLEAT





**BERRIDGE
MANUFACTURING
COMPANY**

VALLEY DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-70

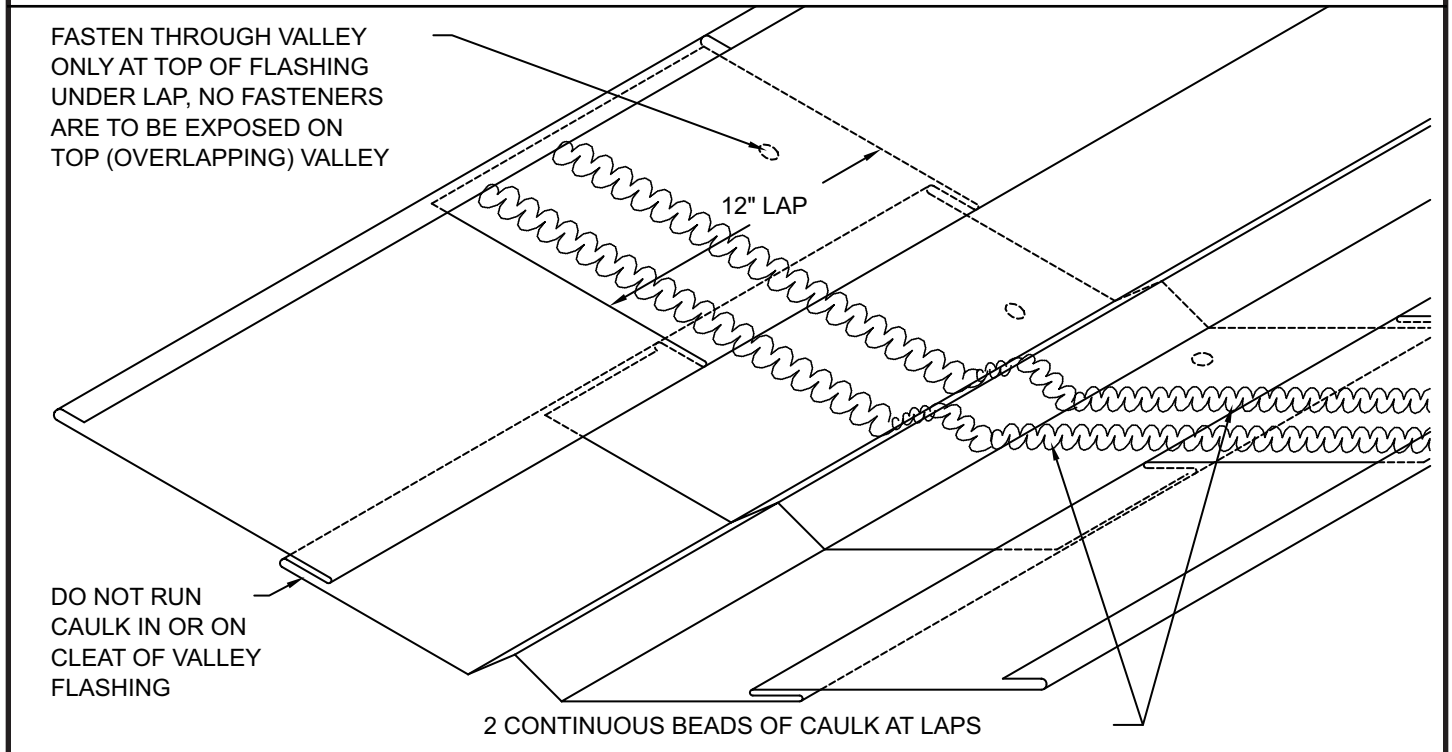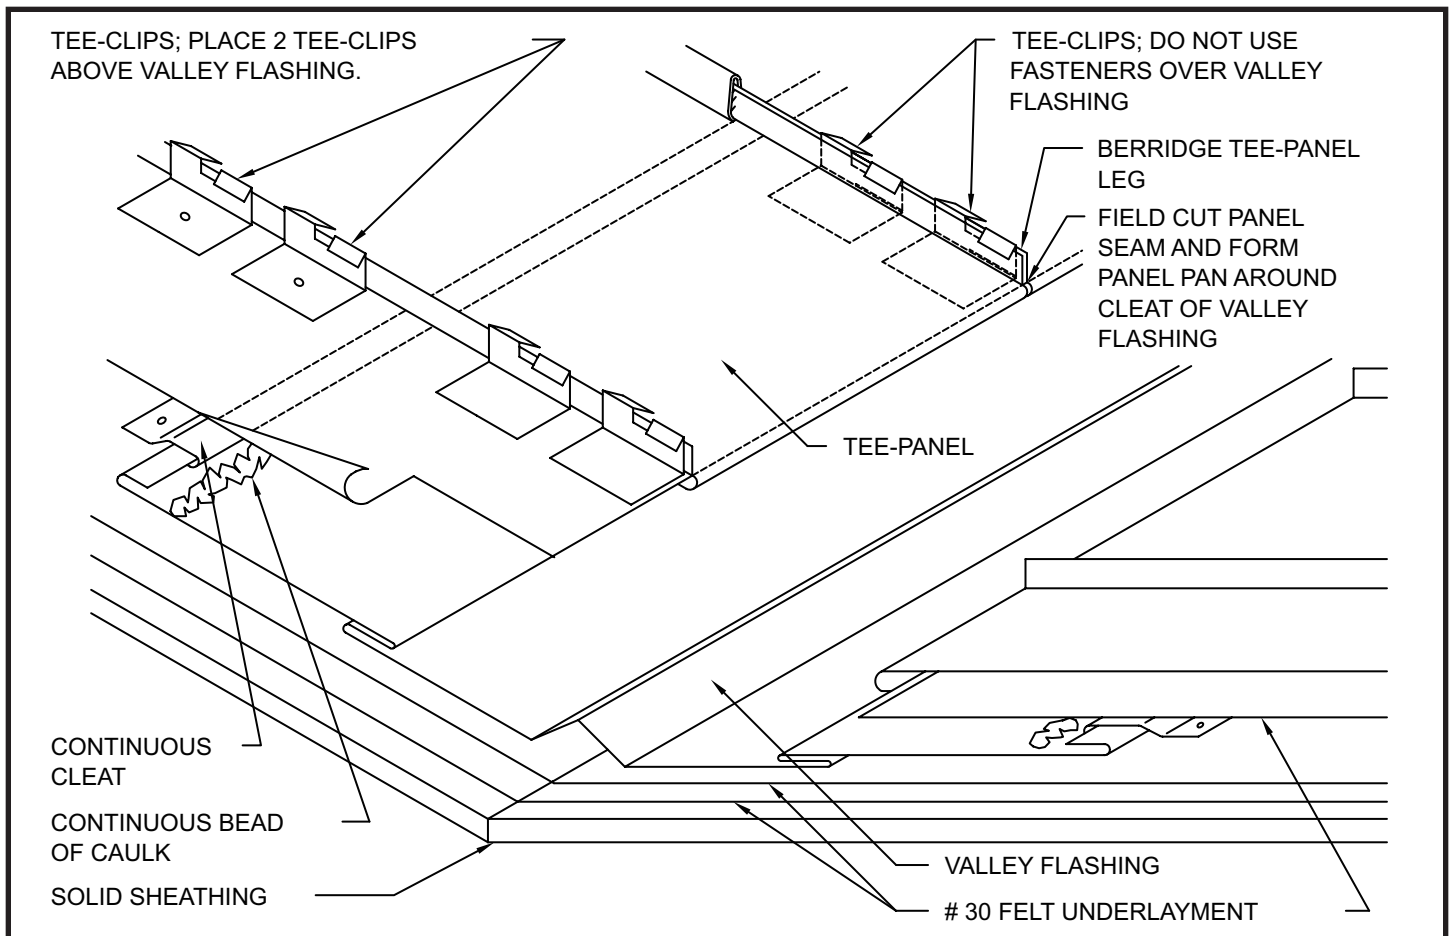

**BERRIDGE
MANUFACTURING
COMPANY**


VALLEY DETAIL; ISOMETRIC

Tee-Panel System

DATE: 06-01-97

PAGE/FILE

T-71

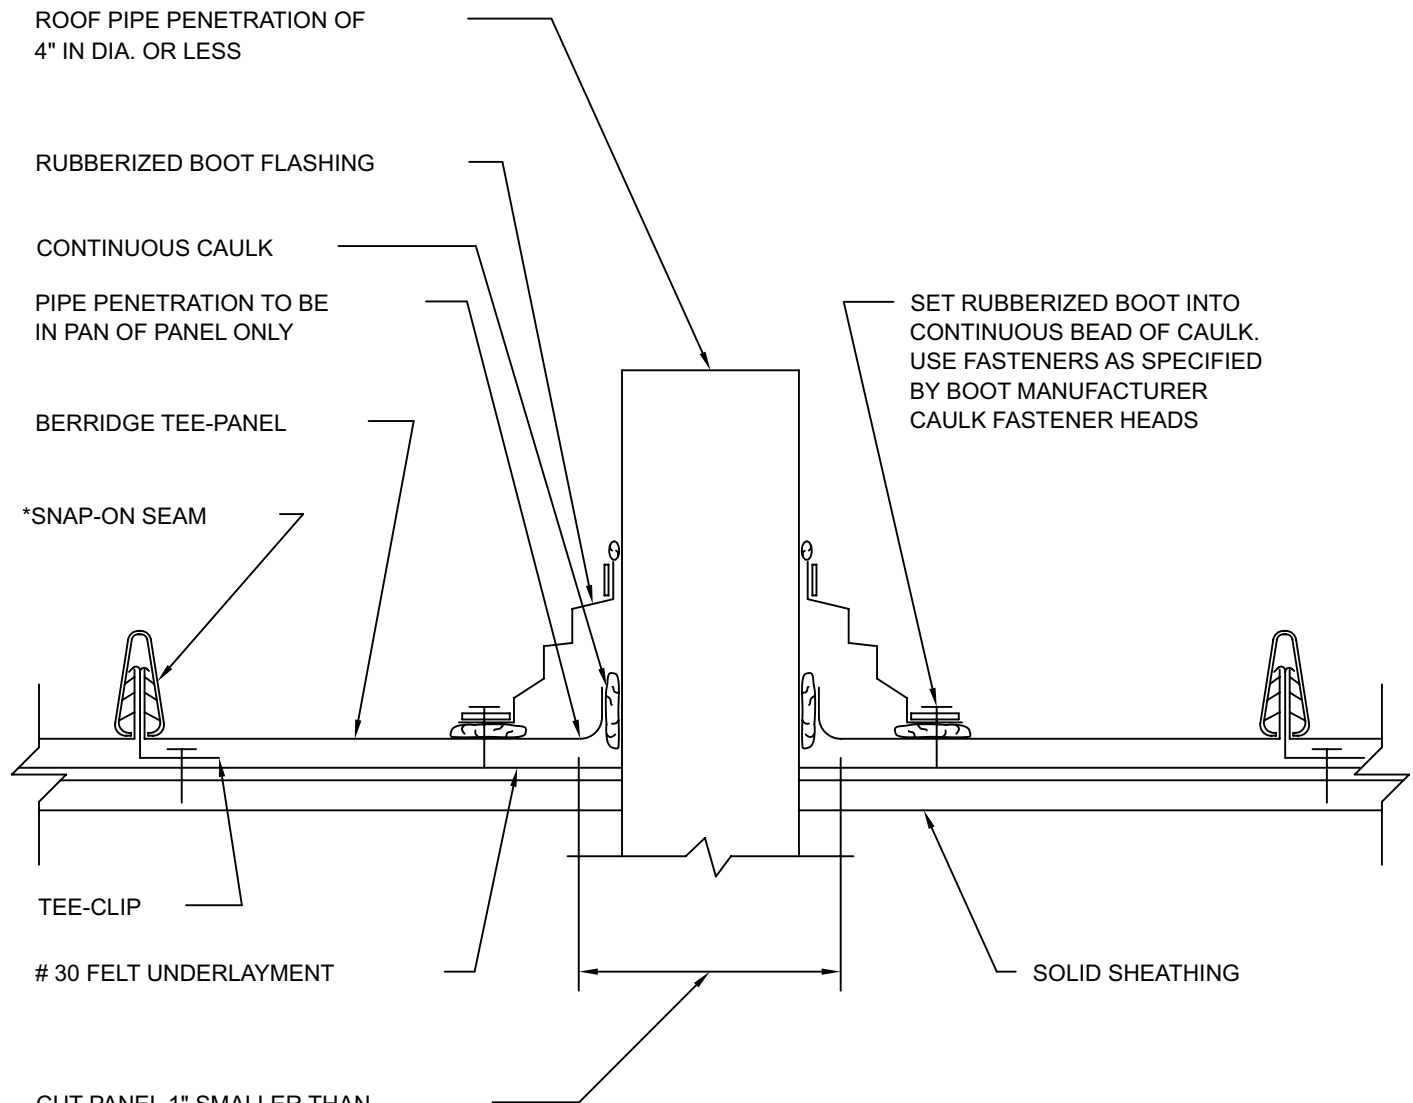

CUT PANEL 1" SMALLER THAN
PENETRATION, BACK CUT TABS,
FOLD TABS UP AROUND
PENETRATION, AND CAULK.

NOTE: CUT HOLE TO ALLOW FOR
THERMAL MOVEMENT IF PANELS
ARE 30'-0" OR LONGER.

NOTE: IF PIPE IS MADE OF METAL,
IT MUST BE PAINTED TO PREVENT RUST
RUN-OFF FROM STAINING PANELS.

NOTE: POSITION SQUARE BASED BOOTS IN A DIAMOND
ORIENTATION WHERE POSSIBLE TO AID IN DIVERTING WATER.

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.



**BERRIDGE
MANUFACTURING
COMPANY**

PIPE PENETRATION (PREFERRED METHOD)
IN PAN OF PANEL ONLY
4" DIA. OR LESS

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-80

*SNAP-ON SEAM IS COVERED UNDER US PATENT NO. 4,641,475.

RUN *SNAP-ON SEAM UP TO STACK AND CAULK

CONTINUOUS BEAD OF CAULK

CRIMP *SNAP-ON SEAM AND FOLD OVER

CUT PANEL LEGS AND LAP TOP LEG IN DIRECTION OF WATER FLOW

RUN *SNAP-ON SEAM UP TO STACK AND CAULK

** SECTION A
PAGE T-82


ROOF PENETRATION CENTERED ON SEAM

** SECTION B
PAGE T-82

ROOF PENETRATION OFF CENTER OF SEAM

****CALL BMC BEFORE USING THIS DETAIL**

NOTE: CALL BMC BEFORE USING DETAILS ON THIS PAGE.
USE ONLY IF PENETRATION OCCURS ON SEAM OR
WITHIN AREA OF PAN THAT WILL NOT ACCOMMODATE
BOOT. USE WITH SOLID SUBSTRATE ONLY.

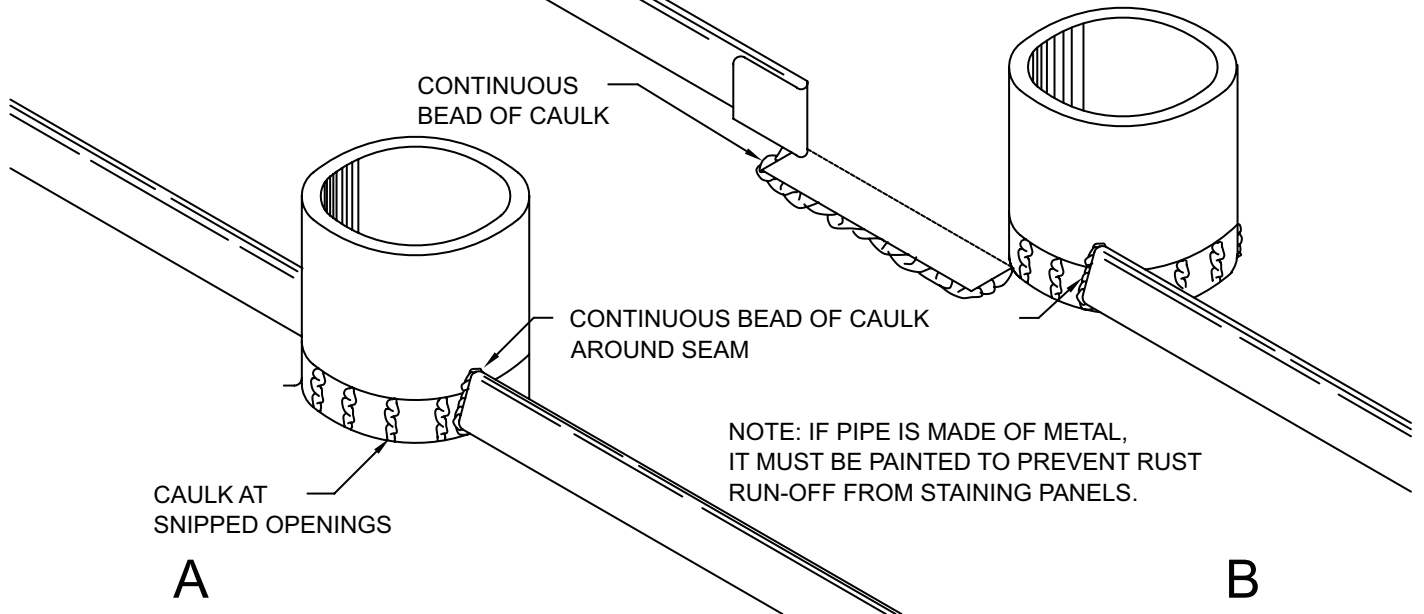

**BERRIDGE
MANUFACTURING
COMPANY**

PIPE PENETRATION OF PANEL
SEAM ISOMETRIC AND PLAN VIEW
****CALL BMC BEFORE USING THIS DETAIL**

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-81

SECTION A **

USE THIS DETAIL WHEN STACK
IS CENTERED ON *SNAP-ON SEAM

ROUND STACK MUST BE OF
MATERIAL COMPATIBLE WITH 24
GA. GALVANIZED PAINTED METAL


CUT TEE-PANEL AND BEND
UP 1" AROUND STACK AND CAULK

MITER ENDS OF *SNAP-ON
SEAM. RUN SEAM UP TO
STACK AND CAULK

30 FELT UNDERLAYMENT

TEE-CLIPS; 2 REQ'D
AT PENETRATION

*SNAP-ON SEAM IS COVERED
UNDER US PATENT NO. 4,641,475.

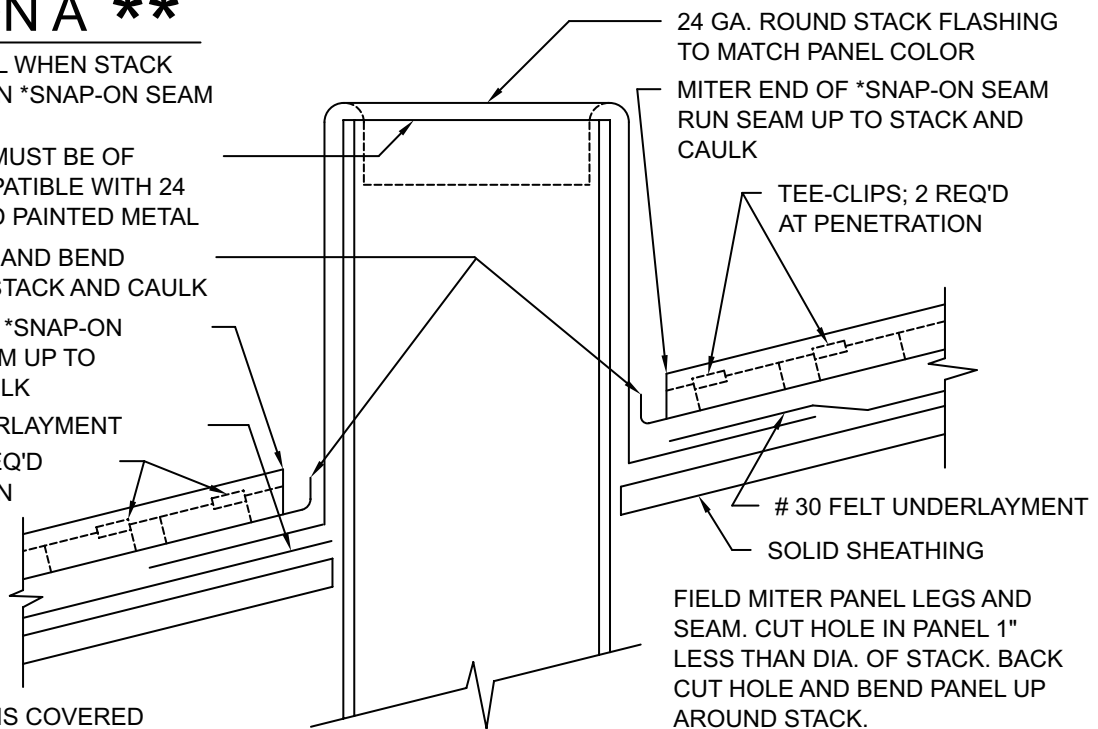

SECTION B **


USE THIS DETAIL WHEN STACK
IS OFF CENTER OF
*SNAP-ON SEAM

ROUND STACK MUST BE OF
MATERIAL COMPATIBLE WITH
24 GA. GALVANIZED PAINTED
METAL

CUT TEE-PANEL AND BEND
UP 1" AROUND STACK AND
CAULK

MITER ENDS OF *SNAP-ON
SEAM. RUN SEAM UP TO
STACK AND CAULK

TEE-CLIPS; 2
REQ'D AT PENETRATION
30 FELT UNDERLAYMENT

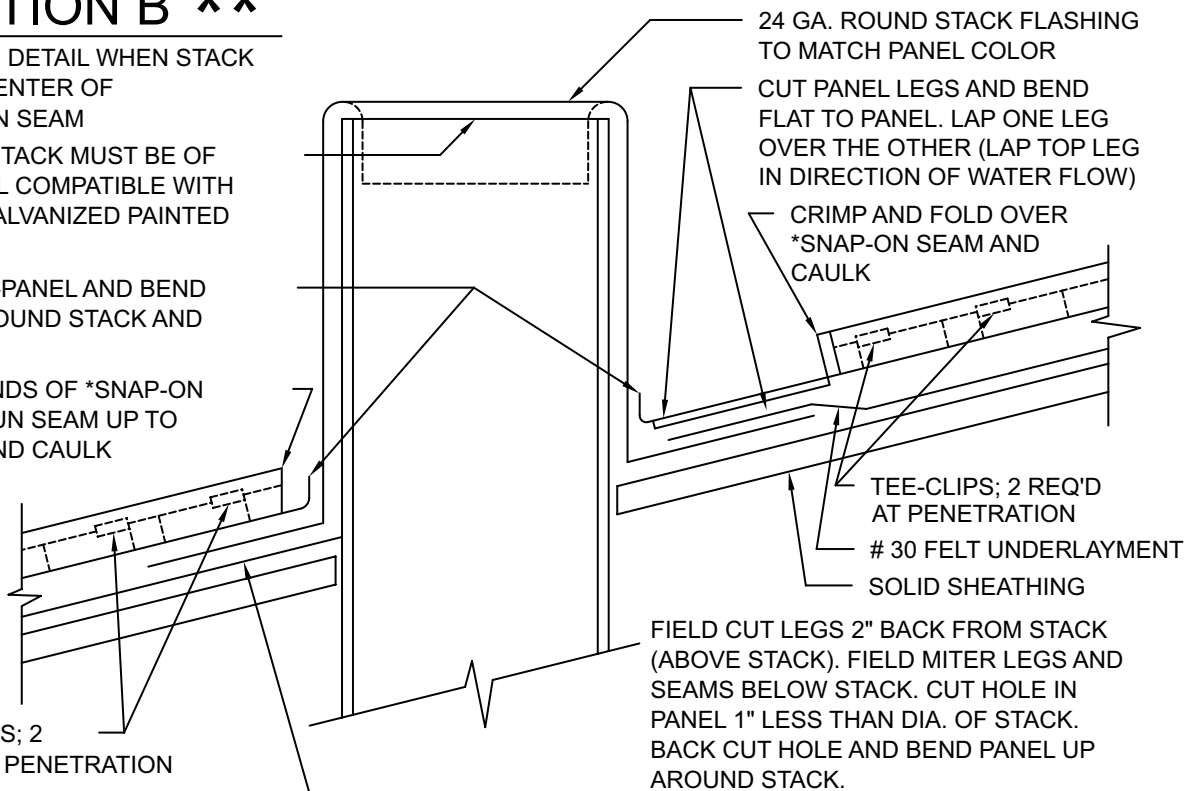

**BERRIDGE
MANUFACTURING
COMPANY**



Roofs of Distinction

PIPE PENETRATION
ON PANEL SEAM; SECTIONS
**CALL BMC BEFORE USING THIS DETAIL

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-82

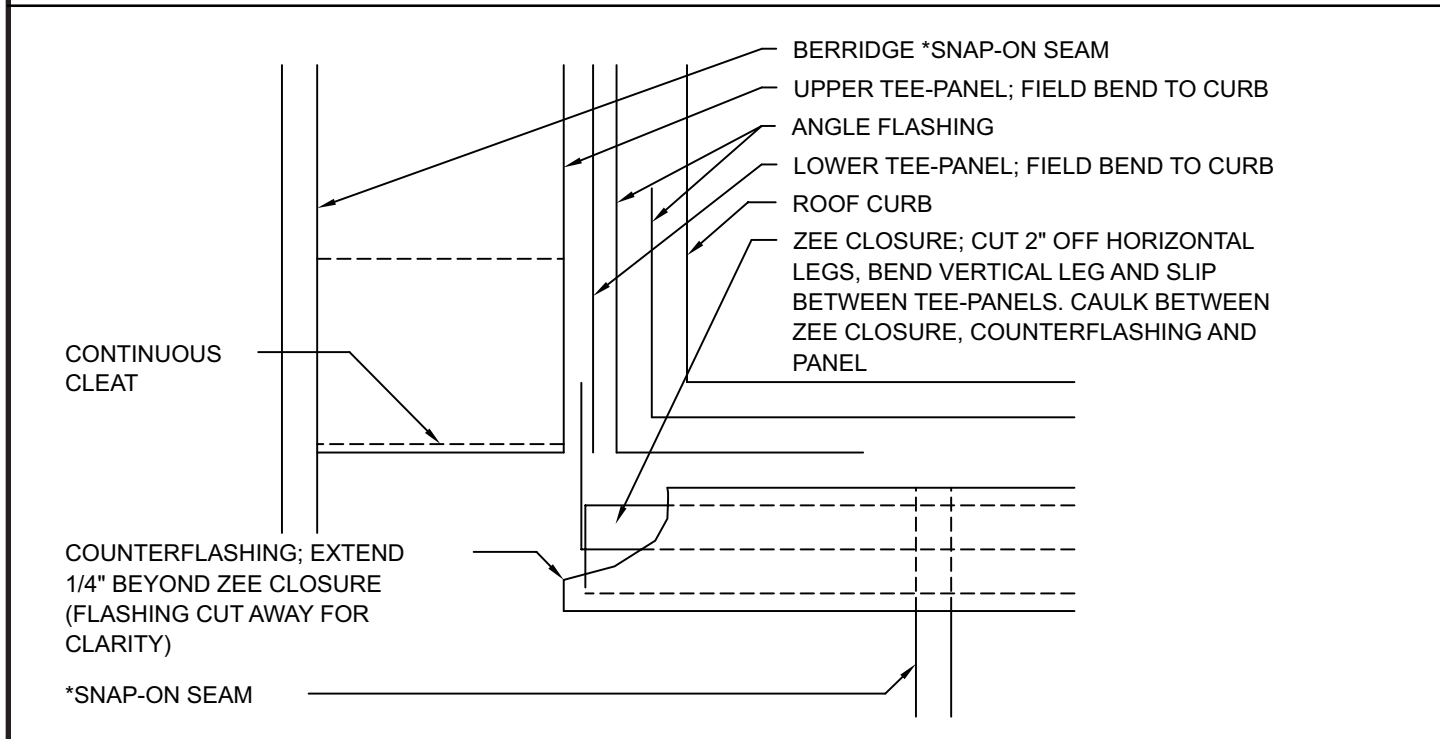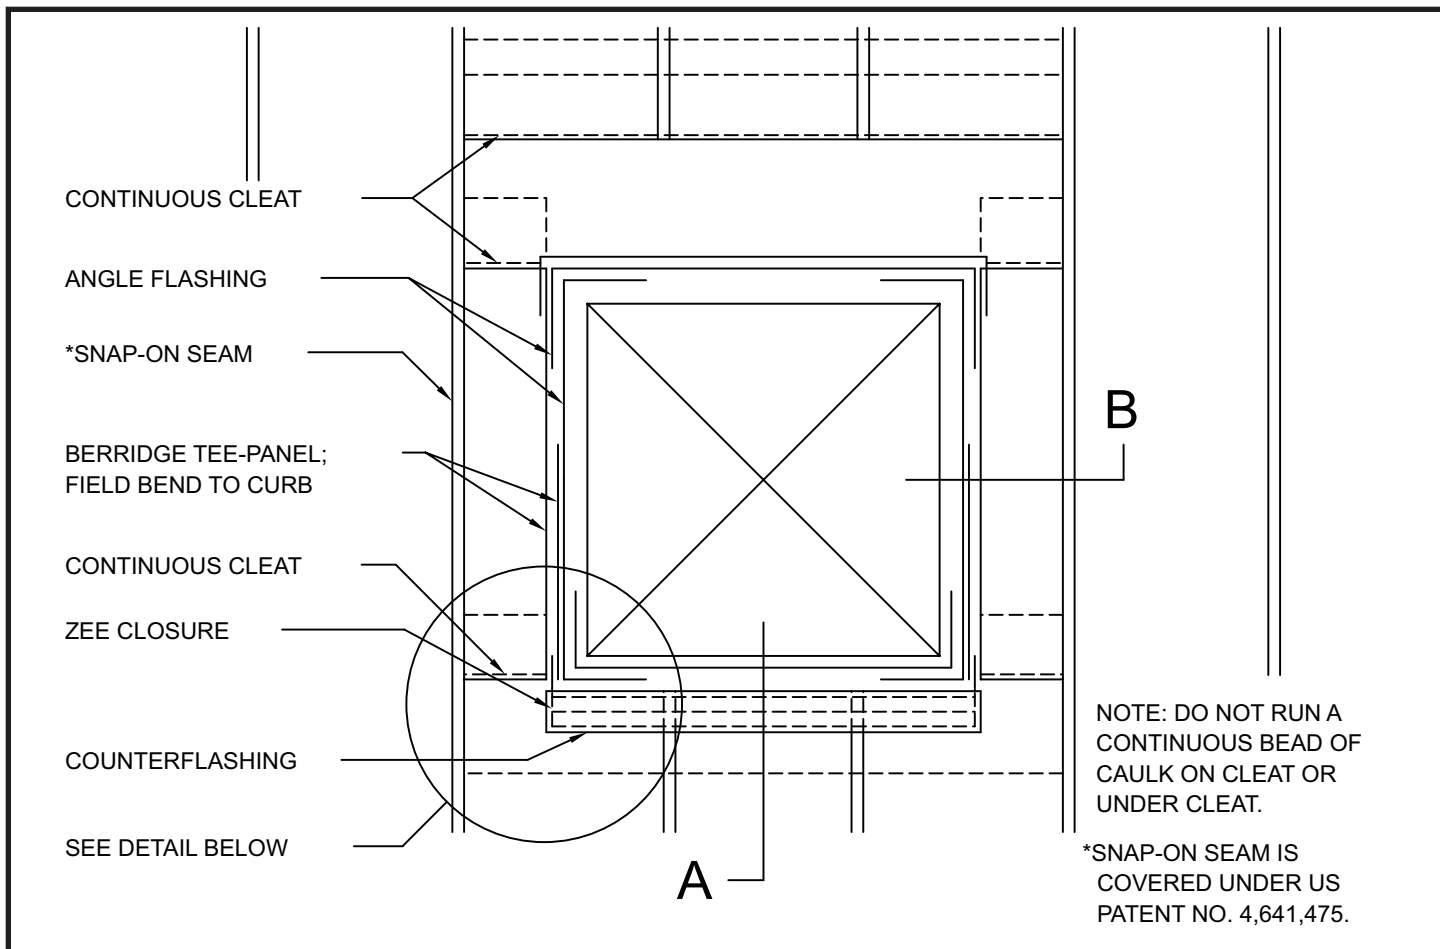


BERRIDGE
MANUFACTURING
COMPANY

ROOF PENETRATION RECTANGULAR/SQUARE


Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-83

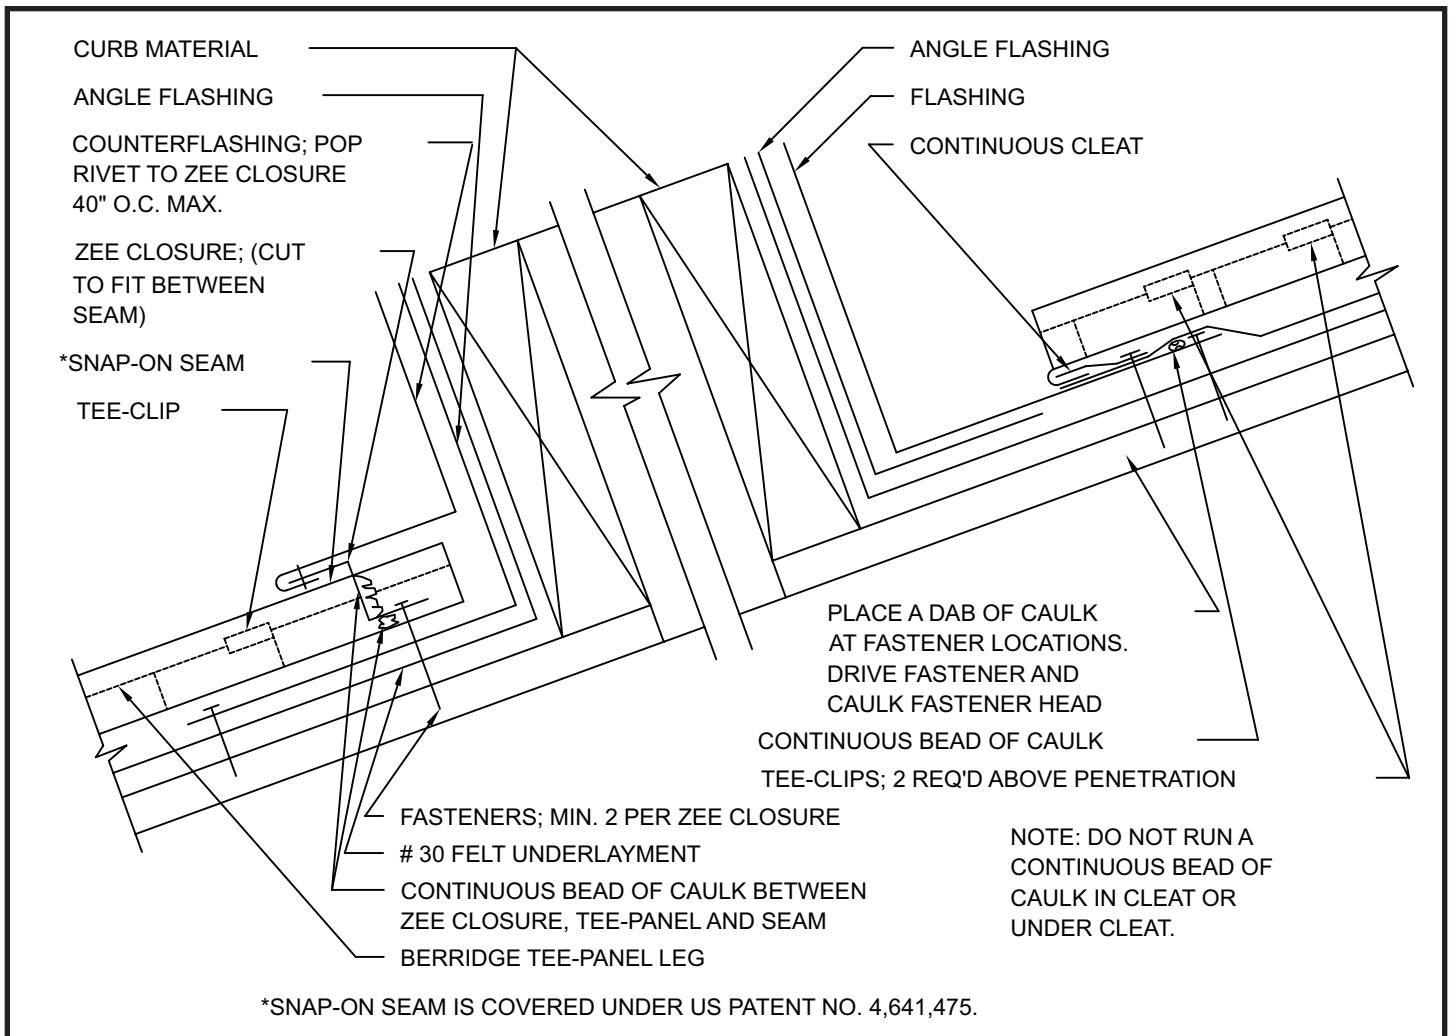

1. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS.
2. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

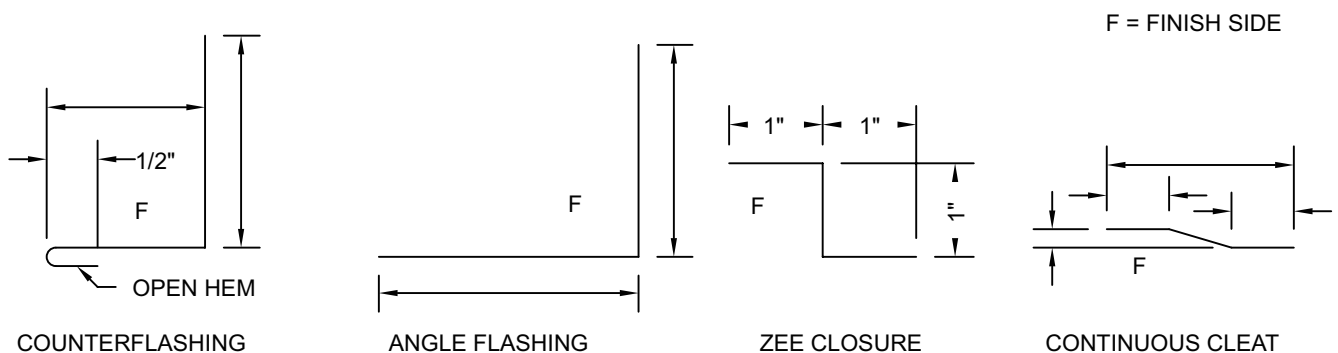


**BERRIDGE
MANUFACTURING
COMPANY**

ROOF PENETRATION SECTION A


Tee-Panel System

DATE: 06-01-97


PAGE/FILE
T-84

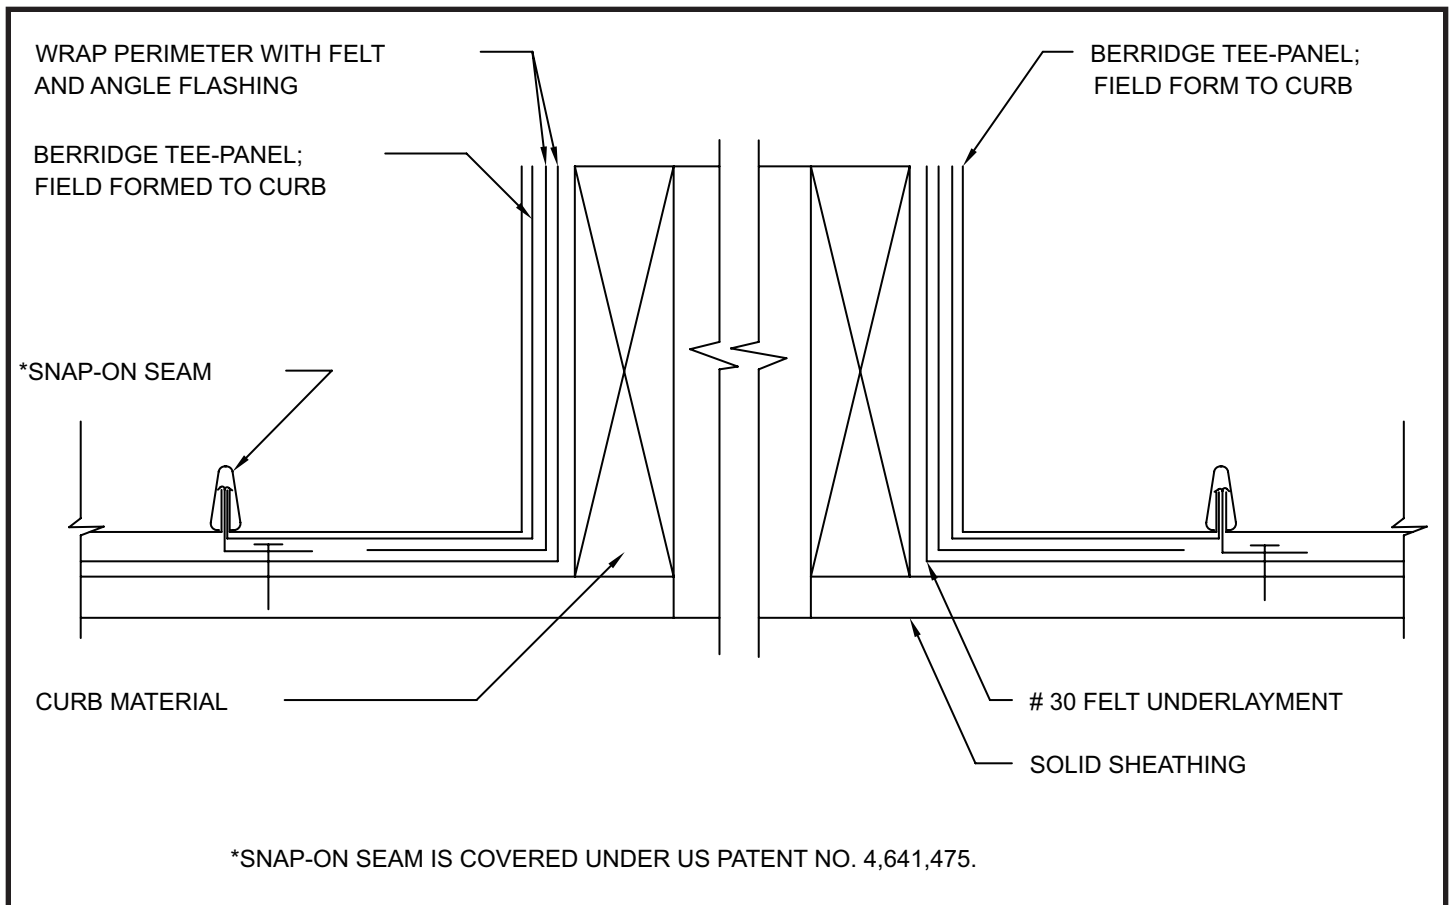

1. SOLID SHEATHING (BY OTHERS) TO BE MINIMUM 1/2" PLYWOOD OR EQUIVALENT IN STRENGTH FOR HOLDING POWER OF FASTENERS. (METAL CORRUGATED SHEATHING, MIN. 24 GA. MAY BE USED IN LIEU OF PLYWOOD).
2. ALL FELT UNDERLAYMENT, CAULKING, AND FASTENERS, ARE ITEMS TO BE FURNISHED AND INSTALLED BY THE ROOFING INSTALLER AT THE DISCRETION OF THE ARCHITECT.

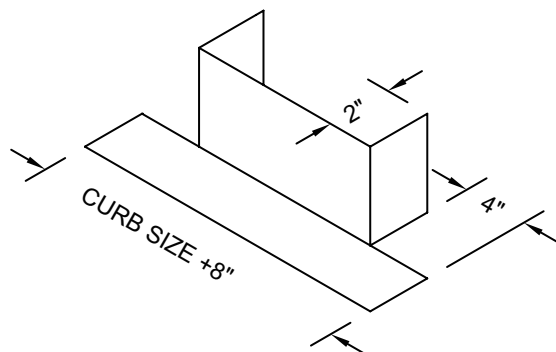

WRAP FLASHING

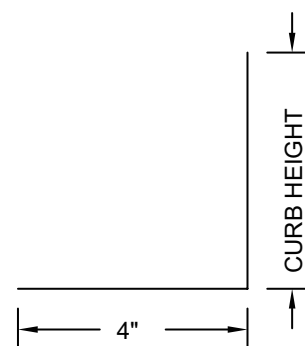

ANGLE FLASHING



**BERRIDGE
MANUFACTURING
COMPANY**

ROOF PENETRATION SECTION B

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-85

DO NOT: RUN CONTINUOUS
CAULK ON OR UNDER
CONTINUOUS CLEAT

CONTINUOUS CLEAT

FLASHING

HEM PANEL PAN
UNDER BOTH SIDES OF
PENETRATION

BERRIDGE TEE-PANEL;
FIELD BEND TO CURB

ANGLE FLASHING

SEE DETAIL BELOW

ZEE CLOSURE; CUT
AND BEND AT END
AND CAULK

ANGLE FLASHING

UPPER
TEE-PANEL

LOWER
TEE-PANEL

CONTINUOUS CLEAT

COUNTERFLASHING; EXTEND
1/4" BEYOND ZEE CLOSURE
(CUT AWAY VIEW FOR CLARITY)

ZEE CLOSURE

CONTINUOUS BEAD OF CAULK
BETWEEN ZEE CLOSURE
AND PANEL




**BERRIDGE
MANUFACTURING
COMPANY**

ROOF PENETRATION ISOMETRIC

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-86

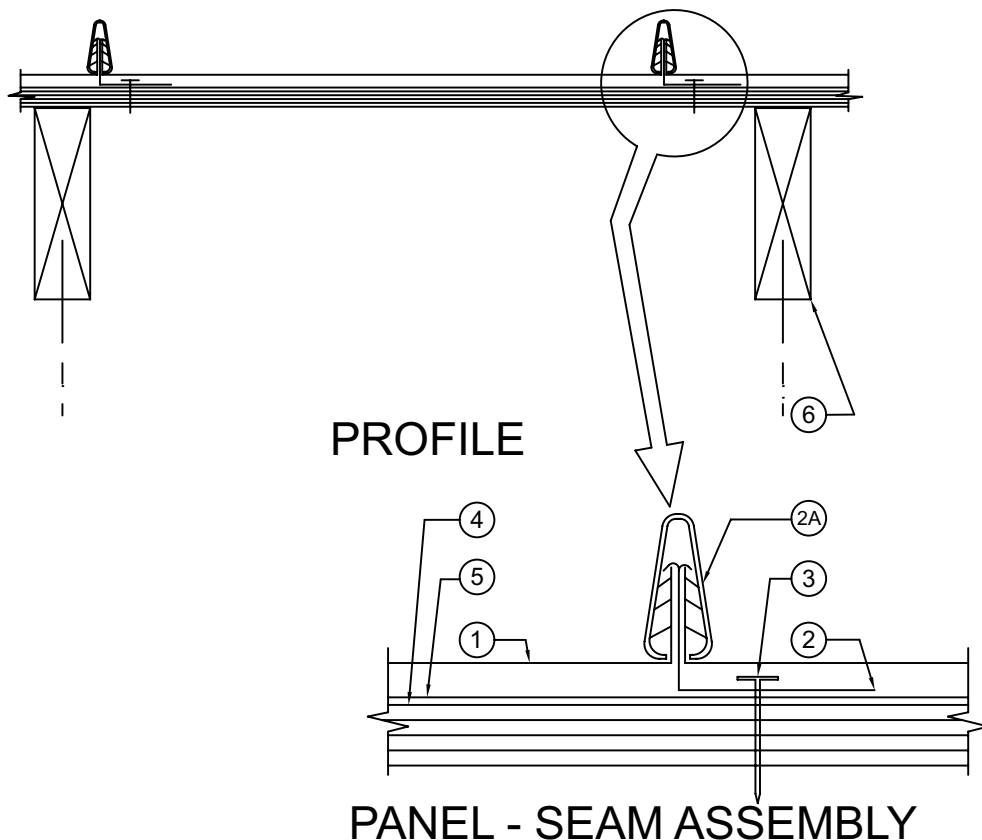

UL CONSTRUCTION ASSEMBLY COMPONENTS

1. METAL ROOF DECK PANELS: No. 24 MSG min. 40,000 psi yield strength coated steel. Panel widths to be 12-3/4" or 19-3/4" and rib height to be 5/8". Total seam height with snap-on seam cover in place is nominal 1". Panels to be continuous length. End laps to be overlapped minimum 6". A line of sealant may be used at end and sidelaps.
Berridge Manufacturing Company - "Tee-Panel"

2. ROOF DECK FASTENERS: (Panel Clips) one piece clip, 3/4" high x 1-1/2" wide x 1-5/8" long, formed from the same type and thickness material as that used to fabricate metal panels. Clips spaced maximum 24" O.C., located at panel sides with guide holes in bottom to accommodate screw fasteners.
Berridge Manufacturing Company - "Tee-Clips"

2A. ROOF DECK FASTENERS: (Seam Covers) Seams covering panel ribs are to be 3/8" wide and 7/8" high with vinyl insert (US Patent No. 4,641,475), formed from the same type and thickness material as that used to fabricate metal panels.
Berridge Manufacturing Company - "Seam Covers"

3. FASTENERS: Screws used to attach the panel clips to plywood to be No. 10 by 1" long pancake head wood screw with a No. 2 Phillips drive. One screw per clip. Screws used to attach plywood substructure to wood trusses of joist to be deformed shank nails. When light ga. Structural Steel joists are used, screws to be No. 12 x 1-5/8" long with Phillips drive head. Spacing of screws to be 6" O.C. at plywood ends and 12" O.C. at interior joints.

4. SUBSTRUCTURE: (Plywood) Plywood decking to be a nominal 5/8" thick, exposure sheathing span C-D, 40/20 plywood. All butt joints are to be sealed with tape and/or caulked.

5. FELT PAPER: Two ply, No. 30 felt per 100 square feet.

6. JOISTS: Joist spaced at 2'-0" O.C. may be one of the following:

- A. Nom. 2 x 6 wood joists No. 2 or better.
- B. Nom. 2 x 4 wood when used on a top chord of a wood truss, No. 2 or better.
- C. Light gauge structural steel framing with the member against the plywood to be a minimum No. 22 MSG coated steel.

FOR ADDITIONAL INFORMATION, PLEASE REFER TO THE UNDERWRITERS LABORATORY, INC.
BUILDING MATERIALS DIRECTORY.



**BERRIDGE
MANUFACTURING
COMPANY**

UL 90 APPROVED
TEE-PANEL ASSEMBLY
CONSTRUCTION NO. 296

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-90

BERRIDGE TEE-PANEL

TEE-CLIP; 20" O.C. (TYPICAL)

#10 TEK SCREW (TYPICAL)

ICE AND WATER SHIELD

BERRIDGE 24 GA.
CORRUGATED SHEATHING

GYPSUM WALLBOARD

MINERAL OR FIBER BOARD INSULATION

STEEL ROOF DECK

STEEL JOIST

1. IN ORDER TO QUALIFY FOR A FIRE-RESISTANT RATING, THE ROOF SYSTEM CANNOT MAKE A PENETRATION IN THE INSULATION SYSTEM. THE TEE-PANEL, IN ORDER TO MAKE POSITIVE ATTACHMENT, MUST BE ATTACHED TO A CORRUGATED SUBSTRATUM (IF THE INSULATION SYSTEM HAS NO AVAILABLE SURFACE). THE CORRUGATED SUBSTRATUM IS TO BE MOUNTED DIRECTLY TO THE INSULATION SYSTEM WITH FASTENERS FASTENED THROUGH INTO THE STRUCTURAL STEEL DECK.
2. THIS ASSEMBLY QUALIFIES FOR THE FOLLOWING UL FIRE-RESISTANT ROOF ASSEMBLIES:
UL DESIGN NO. P224, P225, P230, P237, P508, P510, AND P227 USING CELLULAR GLASS BLOCK IN LIEU OF MINERAL INSULATION BOARD.
3. ADDITIONAL INFORMATION REGARDING THIS ASSEMBLY IS AVAILABLE IN THE UL FIRE RESISTANCE DIRECTORY.



**BERRIDGE
MANUFACTURING
COMPANY**

UL FIRE RESISTANCE ROOF ASSEMBLY

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-91

BERRIDGE TEE-PANEL

TEE-CLIP; 20" O.C. (TYPICAL)

#10 TEK SCREW (TYPICAL)

ICE AND WATER SHIELD


BERRIDGE 24 GA.
CORRUGATED SHEATHING

GYPSUM WALLBOARD

MINERAL OR FIBER BOARD INSULATION

STEEL ROOF DECK

C-SHAPED JOISTS

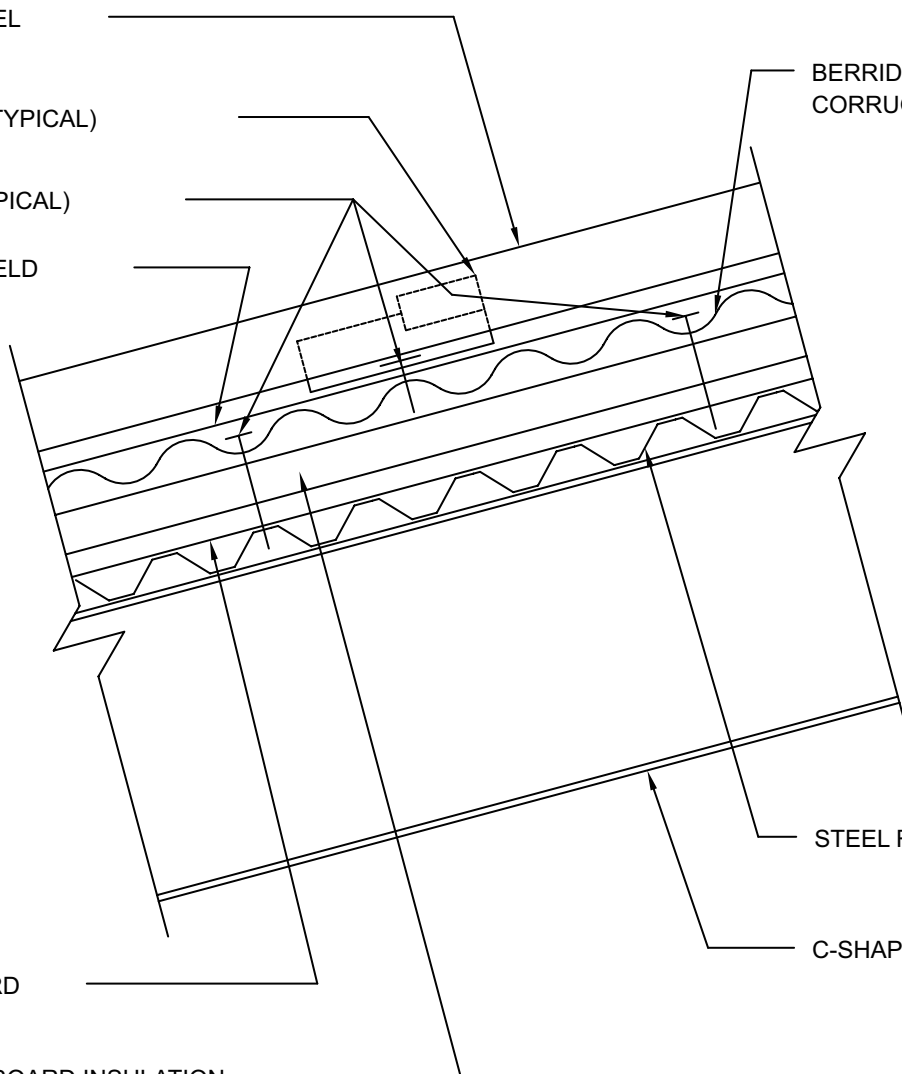

1. IN ORDER TO QUALIFY FOR A FIRE-RESISTANT RATING, THE ROOF SYSTEM CANNOT MAKE A PENETRATION IN THE INSULATION SYSTEM. THE TEE-PANEL, IN ORDER TO MAKE POSITIVE ATTACHMENT, MUST BE ATTACHED TO A CORRUGATED SUBSTRATUM (IF THE INSULATION SYSTEM HAS NO NAILABLE SURFACE). THE CORRUGATED SUBSTRATUM IS TO BE MOUNTED DIRECTLY TO THE INSULATION SYSTEM WITH FASTENERS FASTENED THROUGH INTO THE STRUCTURAL STEEL DECK.
2. THIS ASSEMBLY QUALIFIES FOR THE UL FIRE-RESISTANT ROOF ASSEMBLY: P512.
3. ADDITIONAL INFORMATION REGARDING THIS ASSEMBLY IS AVAILABLE IN THE UL FIRE RESISTANCE DIRECTORY.



**BERRIDGE
MANUFACTURING
COMPANY**

**UL FIRE RESISTANCE
ROOF ASSEMBLY**

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-92


BERRIDGE TEE-PANEL

TEE-CLIP; 20" O.C. (TYPICAL)

#10 TEK SCREW (TYPICAL)

ICE AND WATER SHIELD

BERRIDGE 24 GA.
CORRUGATED SHEATHING

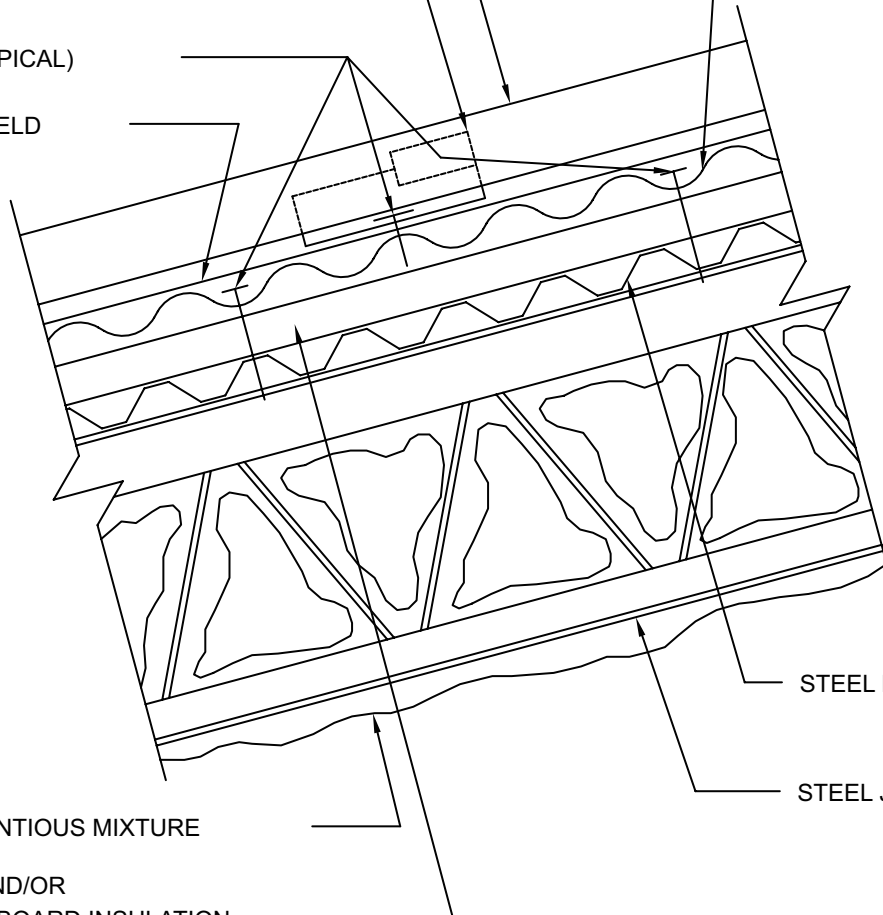

STEEL ROOF DECK

STEEL JOIST

SPRAYED ON CEMENTIOUS MIXTURE

GYPSUM BOARD, AND/OR
MINERAL OR FIBER BOARD INSULATION

1. IN ORDER TO QUALIFY FOR A FIRE-RESISTANT RATING, THE ROOF SYSTEM CANNOT MAKE A PENETRATION IN THE INSULATION SYSTEM. THE TEE-PANEL, IN ORDER TO MAKE POSITIVE ATTACHMENT, MUST BE ATTACHED TO A CORRUGATED SUBSTRATUM (IF THE INSULATION SYSTEM HAS NO NAILABLE SURFACE). THE CORRUGATED SUBSTRATUM IS TO BE MOUNTED DIRECTLY TO THE INSULATION SYSTEM WITH FASTENERS FASTENED THROUGH INTO THE STRUCTURAL STEEL DECK.
2. THIS ASSEMBLY QUALIFIES FOR THE FOLLOWING UL FIRE RESISTANT ROOF ASSEMBLIES:
UL DESIGN NO. P701, P711, P713, P715, P717, P814, P803, P815, P819, AND P821
ONLY USING SPAYED ON FIBER IN LIEU OF CEMENTIOUS MIXTURE.
3. ADDITIONAL INFORMATION REGARDING THIS ASSEMBLY IS AVAILABLE IN THE UL FIRE RESISTANCE DIRECTORY.



**BERRIDGE
MANUFACTURING
COMPANY**

**UL FIRE RESISTANCE
ROOF ASSEMBLY**

Tee-Panel System

DATE: 06-01-97

PAGE/FILE
T-93